

RUST-OLEUM®

FLOORCOAT PU™


HARD WEARING EASY TO APPLY



SINGLE PACK FLOOR COATING
ANY COLOUR, GLOSS AND SATIN

KNOW-HOW TO PROTECT®

APPLICATION AREAS

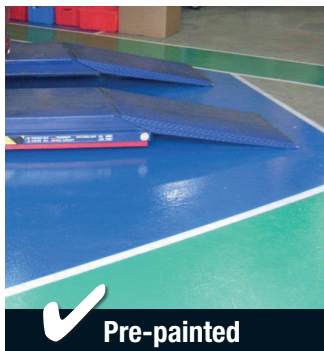

ADVANTAGES

SINGLE PACK FLOOR COATING HARD WEARING & EASY TO APPLY

- ✓ Extra durable because of polyurethane addition
- ✓ Excellent flow
- ✓ Any colour in Gloss and Satin
- ✓ Light to medium traffic, indoor/outdoor
- ✓ High coverage: 9 m²/L per coat



Available in 5L & 2,5L

RUST-OLEUM[®] FLOORCOAT PU[™]

Technical info

Formulation:	Solvent based
Coverage:	9 m ² /L
Touch dry:	4 hrs
Recoating time:	24 hrs
Application:	Brush, roller, airless
Pack sizes:	2,5 L & 5 L
Substrates:	Concrete*, wood, masonry, pre-painted

* Concrete less than 2 years old should be primed first with 7201 Floorcoat PU[™] Primer or etched.

Light Grey
RAL 7035

Steel Grey
RAL 7001

White
RAL 9010

English
Red

Traffic Yellow
RAL 1023

ColourShop[®]
ADVANCED COLOUR SERVICE BY RUST-OLEUM EUROPE

Fully tintable in
Gloss & Satin

Minor differences between printed and supplied colours are possible due to printing limitations.

FLOORCOAT PU™ PRIMER

- ✓ Improves adhesion
- ✓ On fresh concrete (>28 days)
- ✓ No etching needed



EXCELLENT ADHESION WITHOUT ETCHING

Your Rust-Oleum® distributor:



@RustOleumEU



/RustOleumEU



/RustOleumEU

RUST-OLEUM®-products are manufactured by Rust-Oleum Europe under license from Rust-Oleum International, USA. RUST-OLEUM® is a registered trademark of Rust-Oleum Europe. The guidelines in this brochure are provided for information purposes only. © Copyright 2015 Rust-Oleum Europe. All rights reserved. The images shown in this catalogue may differ from the actual product.

Rust-Oleum UK Ltd. P.O. Box 261
Chester-le-Street DH3 9EH - United Kingdom
T: +44 (0)2476 717 329 - info@rust-oleum.eu

Rust-Oleum Europe
Kolenbergstraat 23, 3545 Zelem, Belgium
T: +32 (0)13 460 200 F: +32 (0)13 460 201 - info@rust-oleum.eu