

Innovations

and Spring-Summer Campaign 2018







Zyklop VDE

We want users of our tools to work safely and comfortably.

The Zyklop VDE ratchet and accessories are the right tools for safe working on electrical systems, with features that will impress, even in tight conditions.



Increased security



The Zyklop VDE sockets and extensions offer increased safety thanks to their 2-component isolation with yellow insulation core under red insulation outer layer.



Finely toothed



The Zyklop VDE ratchet allows a short return angle of only 4.5 ° thanks to its 80 teeth.



For tight spaces



The extremely slim design of the Zyklop VDE ratchet makes it easy to work, even in confined spaces.



Ball lock



The ball lock ensures sockets and accessories are securely fitted, providing increased safety during operation. A short press on the release button allows the tool to be changed quickly.



Zyklop VDE

8100 SB VDE 1 Zyklop Ratchet set, insulated, switch lever, 3/8"drive, metric











8007 B VDE Zyklop ratchet, insulated, with switch lever, with 3/8"drive











Application:

 $^{3}\!/_{\rm 8}$ " square sockets as well as for $^{3}\!/_{\rm 8}$ " adaptors with square drive, with ball locking device

Design:

Individually tested as per IEC 60900 at 10,000V for safe working at the approved voltage of 1,000V; slim design to $\,$ enable work in very confined spaces; fine-tooth mechanism with 80 teeth for a return angle of only 4.5°; switch lever for convenient change of direction; secure socket locking

function by push button

 $17\ pieces; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility. Fleece backing and hook and$ loop fastener system for easy attachment, e. g. on wall, shelf, workshop trolley and the Wera 2go tool transport system. Smooth rotating mechanism for safe storage and easy removal of the Zyklop VDE sockets.

•					
	0	8.			
		mm			
05 004966 001	3/8"	222,0			

1 Zyklop Ratchet 8007 B VDE, with switch lever, with $\sqrt[3]{8}$ "drive, 14 Zyklop VDE sockets, 2 Zyklop VDE extensions, one long, one short, all tools insulated, individually tested as per IEC 60900 at 10,000V for safe working at the approved voltage of 1,000V. The Zyklop VDE sockets and extensions offer increased safety through 2-component isolation with yellow insulation core, which becomes visible in case of damage to the outer red VDE insulation layer.

•		
05 004970 001		
0	8007 B VDE	1 x 3/8"x222,0
•	8790 B VDE	1 x 6,0x46,0; 1 x 7,0x46,0; 1 x 8,0x46,0;
		1 x 9,0x46,0; 1 x 10,0x46,0; 1 x 11,0x46,0;
		1 x 12,0x46,0; 1 x 13,0x46,0; 1 x 14,0x46,0;
		1 x 15,0x46,0; 1 x 16,0x46,0; 1 x 17,0x46,0;
		1 x 18,0x46,0; 1 x 19,0x46,0
	8794 SB VDE	1 x 3/8"x91,0
●0	8794 LB VDE	1 x 3/8"x166,0





We wanted working with torque wrenches to be simple and accurate which is why we developed the Click-Torque wrenches.

With the ability to set and save the default values and with the unmistakable, robust Wera design, these torque wrenches are the ideal tools for all bolting applications. Clockwise torque wrenches allow torque-controlled tightening whilst torque wrenches for insert tools control tightening and loosening.

Click 1: Setting the scale values



With audible and tactile clicks when adjusting the scale values.

Click 2: Release mechanism




When the set torque value is reached, an audible and tactile mechanism triggers.

Wide range



The Click-Torque wrenches are available for clockwise torque-controlled tightening with a reversible ratchet (¼", %", ½" and ¾" drive) or for insert tools (9×12 mm, 14×18 mm) for torque ranges from 2.5 Nm to 1000 Nm.

For right-handed use



The reversible Click-Torque wrenches are for right-handed use, the Click-Torque wrenches for insert tools are suitable for right-hand and left-hand uses.

Robust models



Very robust design with reversible ratchet (45 teeth) or for insert tools (9×12mm or 14×18mm) and ergonomic 2-component handle.

Exact



Precise to ±3% (rep. ±4%) as per DIN EN ISO 6789-1:2017-07.





Click-Torque A 5 torque wrench with reversible ratchet









Application: For clockwise torque-control

Precision: \pm 4% of set value, as per DIN EN ISO 6789-1: 2017-07

With ¼" square drive, reversible ratchet, 45 teeth; easy setting and saving of the desired torque value, with audible and tactile locking when the scale values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached Design:

Handle: Ergonomic 2-component handle

•															
	0		إباإبا	 	ē ⇒⊫≐	⊕	-		(<u>-</u>	أسات	o=====	•		♦ <u> </u>	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05 075604 001	1/4"	2,5-25	0,10	1-18	290	121	42	25	11,5	11 ²⁷ / ₆₄ "	4 49/64"	1 21/32"	1"	⁷ / ₁₆ "	

Click-Torque A 6 torque wrench with reversible ratchet









Application: For clockwise torque-control

± 4% of set value, as per DIN EN ISO 6789-1: 2017-07 Precision:

Design: With 14" hex drive, reversible ratchet, 45 teeth; easy setting and saving of the desired torque value, with audible and tactile locking when the scale

values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached

Handle: Ergonomic 2-component handle

•															
			 [-		ĕ ==≐	ص ح ت	•		(<u>-</u>	أ ن هت	ص ع ت	•		♦ □	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05 075605 001	1/4"	2,5-25	0,10	1-18	290	121	42	25	11,5	11 ²⁷ / ₆₄ "	4 49/64"	1 21/32"	1"	⁷ / ₁₆ "	

Click-Torque B 1 torque wrench with reversible ratchet







Application: For clockwise torque-control

Precision: ± 3% of set value, as per DIN EN ISO 6789-1: 2017-07

With $^{3}/_{8}^{\text{m}}$ square drive, reversible ratchet, 45 teeth; easy setting and saving of the desired torque value, with audible and tactile locking when the scale values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached Design:

Handle: Ergonomic 2-component handle

•															
	0		 <u> </u> 		ئست	<u>مت</u>	•		 	ئ ے	ص حا ت	○		♦ <u> </u>	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05 075610 001	3/8"	10-50	0,25	8-36	360	140	47	35	16,5	14 11/64"	5 33/64"	1 27/32"	1 %"	5/8"	

Click-Torque B 2 torque wrench with reversible ratchet





Application: For clockwise torque-control

Precision: \pm 3% of set value, as per DIN EN ISO 6789-1: 2017-07

With 3 / $_{8}^{*}$ square drive, reversible ratchet, 45 teeth; easy setting and saving of the desired torque value, with audible and tactile locking when the scale values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached Design:

Handle: Ergonomic 2-component handle

•															
	0		 <u> </u>- - -		ئ ىد ە	•	•		† <u>-</u>	å=	∞= ∷	○		♦ □	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05 075611 001	3/8"	20-100	0,5	15-73	405	140	47	43	18,5	15 ¹⁵ / ₁₆ "	5 33/64"	1 ²⁷ / ₃₂ "	1 11/16"	45/64"	

Click-Torque C 1 torque wrench with reversible ratchet





Application: For clockwise torque-control

Precision: \pm 3% of set value, as per DIN EN ISO 6789-1: 2017-07

With $\frac{1}{2}$ square drive, reversible ratchet, 45 teeth; easy setting and saving of the desired torque value, with audible and tactile locking when the scale values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached Design:

Ergonomic 2-component handle Handle:

•															
	0		 <u> </u>- - -		i== ∴	∞=	•		†	i== ∴	⊙=	○		♦ □	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05 075620 001	1/2"	10-50	0,25	8-36	360	140	47	35	16,5	14 11/64"	5 33/64"	1 27/32"	1 3/8"	5/8"	

Click-Torque C 2 torque wrench with reversible ratchet





Application: For clockwise torque-control

 \pm 3% of set value, as per DIN EN ISO 6789-1: 2017-07 **Precision:**

With ½" square drive, reversible ratchet, 45 teeth; easy setting and saving of the desired torque value, with audible and tactile locking when the scale values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached Design:

Handle: Ergonomic 2-component handle

•															
	0		 [- 			ناد ی	•) <u> </u>	ئ ىس ە	ص حا	○		†	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05 075621 001	1/2"	20-100	0,5	15-73	405	140	47	43	18,5	15 ¹⁵ / ₁₆ "	5 33/64"	1 27/32"	1 11/16"	45/64"	

Click-Torque C 3 torque wrench with reversible ratchet







Application: For clockwise torque-control

Precision: \pm 3% of set value, as per DIN EN ISO 6789-1: 2017-07

With ½" square drive, reversible ratchet, 45 teeth; easy setting and saving of the desired torque value, with audible and tactile locking when the scale values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached Design:

Handle: Ergonomic 2-component handle

•															
	0	 	 <u> </u>- - 	 	ق	o=====	o==		(ض حت	•= 1	-		†	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05 075622 001	1/2"	40-200	1,0	30-146	510	140	47	43	18,5	20 5/64"	5 33/64"	1 27/32"	1 11/16"	45/64"	

Click-Torque C 4 torque wrench with reversible ratchet







Application: For clockwise torque-control

 \pm 3% of set value, as per DIN EN ISO 6789-1: 2017-07 **Precision:**

With ½" square drive, reversible ratchet, 45 teeth; easy setting and saving of the desired torque value, with audible and tactile locking when the scale values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached Design:

Ergonomic 2-component handle Handle:

•															
	0	 	 <u> </u> 		<u></u>	•======	•		(_	ن ست	o= = 1.	○		†	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05 075623 001	1/2"	60-300	1,0	45-220	595	140	47	43	18,5	23 27/64"	5 33/64"	1 27/32"	1 11/16"	45/64"	

8100 SA All-in Zyklop Speed Ratchet Set, 1/4" drive, with holding function, metric















42-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility. Non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the sockets.

1 Zyklop Speed Ratchet with ${}^{1}\!/_{4}$ " drive, 13 Zyklop sockets with ${}^{1}\!/_{4}$ " drive with fastener holding function, 9 Zyklop bit sockets for TORX® screws, with ${}^{1}\!/_{4}$ " drive, with holding function, 8 bit sockets for hexagon socket screws with ${}^{1}\!/_{4}$ " drive with holding function (sizes 2.0 and 2.5 without holding function) and Hex-Plus high torque geometry, 3 Zyklop bit sockets with ${}^{1}\!/_{4}$ " drive for Phillips screws, 3 Zyklop bit sockets with ${}^{1}\!/_{4}$ " drive for Poillips Sockets with ${}^{1}\!/_{4}$ " drive fo

+		
05 003755 001		
0	8000 A	1 x 1/4"x152,0
●0	8796 LA	1 x 1/4"x150,0
●0	8794 A	1 x 1/4"x56,0
•	8790 HMA HF	1 x 4,0x23,0; 1 x 4,5x23,0; 1 x 5,0x23,0;
		1 x 5,5x23,0; 1 x 6,0x23,0; 1 x 7,0x23,0;
		1 x 8,0x23,0; 1 x 9,0x23,0; 1 x 10,0x23,0;
		1 x 11,0x23,0; 1 x 12,0x23,0; 1 x 13,0x23,0;
		1 x 14,0x23,0
0	8767 A HF	1 x TX 8x28,0; 1 x TX 9x28,0; 1 x TX 10x28,0;
		1 x TX 15x28,0; 1 x TX 20x28,0; 1 x TX 25x28,0;
		1 x TX 27x28,0; 1 x TX 30x28,0; 1 x TX 40x28,0
0	8740 A	1 x 2,0x28,0; 1 x 2,5x28,0
0	8740 A HF	1 x 3,0x28,0; 1 x 4,0x28,0; 1 x 5,0x28,0;
		1 x 6,0x28,0; 1 x 7,0x28,0; 1 x 8,0x28,0
0	8751 A	1 x PH 1x28,0; 1 x PH 2x28,0; 1 x PH 3x28,0
0	8755 A	1 x PZ 1x28,0; 1 x PZ 2x28,0; 1 x PZ 3x28,0
•	8700 A FL	1 x 0,8x5,5x28,0; 1 x 1,2x6,5x28,0
	Nut Extractor	1 x 14,0x43,0

New

8100 SA 12 HF Zyklop Metal Ratchet Set with switch lever, 1/4" drive, metric















13-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Metal Ratchet with switch lever and $^{1}/_{4}$ " drive, 9 Zyklop sockets with $^{1}/_{4}$ " drive with fastener holding function, 1 Zyklop extension (long) with freeturning sleeve, 1 wobble extension, 1 tool for the simple removal of nuts from sockets with holding function.

+		
05 003756 001		
0	8004 A	1 x 1/4"x141,0
	8794 LA	1 x 1/4"x150,0
	8794 A	1 x 1/4"x56,0
•	8790 HMA HF	1 x 5,0x23,0; 1 x 5,5x23,0; 1 x 6,0x23,0;
		1 x 7,0x23,0; 1 x 8,0x23,0; 1 x 10,0x23,0;
		1 x 11,0x23,0; 1 x 12,0x23,0; 1 x 13,0x23,0
	Nut Extractor	1 x 14,0x43,0

Tip



Sockets with holding function for hex head bolts and nuts



The clamping of the hex bolt or nut in the socket is ensured by means of two spring-loaded balls and a permanently elastic, high-strength shrink tubing. This is protected effectively against mechanical damage by a frontal steel band. This is particularly helpful in difficult-to-access working areas where it is not possible to use the second hand to hold the bolt.

Belt A Imperial 1 Zyklop In-Hex-Plus bit socket set with holding function, 1/," drive



9-piece; robust textile socket belt, including snap hook to enable secure fastening to a belt loop or pocket. Non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the sockets.

9 bit sockets for hexagon socket screws with $^{1}/_{4}$ " drive with holding function (sizes: $^{5}/_{64}$ ", $^{7}/_{32}$ " and $^{7}/_{64}$ " without holding function) and Hex-Plus high torque geometry. Take it easy tool finder: Colour coding to enable the desired bit socket to be easily selected.

•		
05 003884 001		
0	8740 A	1 x 5/64"x28,0; 1 x 3/32"x28,0; 1 x 7/64"x28,0
0	8740 A HF	1 x 1/8"x28,0; 1 x 9/64"x28,0; 1 x 5/32"x28,0;
		1 x 3/16"x28,0; 1 x 7/32"x28,0; 1 x 1/4"x28,0
	Belt A 0/8	1 x 39,0x220,0
	Hook and Loop Fastener Strip	1 x 30,0x200,0

New

8740 A HF Zyklop bit socket with holding function, 1/4" drive



Application: Hexagon socket screws

Design:

Manual and (non-impact) machine applications, ball intercept ring, knurls at base for precision handling in manual operations, bit sockets with all the advantages of the Wera bit technology, brushed chrome-plated finish, holding function for hexagon socket screws. Take it easy tool finder: Colour coding to enable the desired bit socket to be easily located

•						
	0	∄ ‡			<u></u> ;	
	inch	mm	mm	mm	mm	
05 003383 001	1/8"	28,0	12,0	12,5	11,0	
05 003384 001	9/64"	28,0	12,0	12,5	11,0	
05 003385 001	5/_"	28,0	12,0	12,5	11,0	
05 003386 001	3/ ₁₆ "	28,0	12,0	12,5	11,0	
05 003387 001	7/ ₃₂ "	28,0	12,0	12,5	11,0	
05 003388 001	1/4"	28,0	12,0	12,5	11,0	
05 003389 001	5/_"	28,0	12,0	12,5	11,0	

8740 A Zyklop bit socket, 1/4" drive







Application: Hexagon socket screws

Design:

Manual and (non-impact) machine applications, ball intercept ring, knurls at base for precision handling in manual operations, bit sockets with all the advantages of the Wera bit technology, brushed chrome-plated finish. Take it easy tool finder: Colour coding to enable the desired bit socket to be easily located

•						
	0	∄;		Δ	∏;	
	inch	mm	mm	mm	mm	
05 003380 001	5/64	28,0	12,0	12,5	11,0	
05 003381 001	3/_"	28,0	12,0	12,5	11,0	
05 003382 001	7/ ₆₄ "	28,0	12,0	12,5	11,0	

Tip



Bit sockets with holding function for hexagon socket screws



The clamping of the hex socket screw in the bit socket is ensured by means of a spring-loaded ball on the bit. This is particularly helpful in difficult-to-access working areas where it is not possible to use a second hand to hold the screw.

Belt B 1 Zyklop socket set with holding function, ³/₈" drive



10-piece; robust textile socket belt, including snap hook to enable secure fastening to a belt loop or pocket. Non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the sockets.

9 Zyklop sockets with 3 / $_8$ " drive with fastener holding function. Take it easy tool finder: Colour coding to enable the desired socket to be easily selected. 1 tool for the simple removal of nuts from sockets with holding function.

•		
05 003970 001		
•	8790 HMB HF	1 x 8,0x29,0; 1 x 10,0x29,0; 1 x 12,0x29,0; 1 x 13,0x29,0; 1 x 15,0x29,0; 1 x 16,0x29,0; 1 x 17,0x29,0; 1 x 18,0x29,0; 1 x 19,0x29,0
	Nut Extractor	1 x 14,0x43,0
	Belt B 0/9	1 x 45,0x310,0
	Hook and Loop Fastener Strip	1 x 30,0x200,0

New

Belt B 3 TORX® HF Zyklop bit socket set with holding function, 3/8" drive



9-piece; robust textile socket belt, including snap hook to enable secure fastening to a belt loop or pocket. Non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the tool sockets.

9 Zyklop bit sockets for TORX® screws, with 3I_8 " drive, with holding function. Take it easy tool finder: Colour coding to enable the desired bit socket to be easily selected.

+		
05 003972 001		
0	8767 B HF	1 x TX 10x35,0; 1 x TX 15x35,0; 1 x TX 20x35,0;
		1 x TX 25x35,0; 1 x TX 27x35,0; 1 x TX 30x35,0;
		1 x TX 40x35,0; 1 x TX 45x38,5; 1 x TX 50x38,5
	Belt B 0/9	1 x 45,0x310,0
	Hook and Loop Fastener Strip	1 x 30,0x200,0

New

Belt B 2 Zyklop In-Hex-Plus bit socket set with holding function, 3/8" drive



8-piece; robust textile socket belt, including snap hook to enable secure fastening to a belt loop or pocket. Non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the sockets.

8 bit sockets for hexagon socket screws with $^3/_8$ " drive with holding function and Hex-Plus high torque geometry. Take it easy tool finder: Colour coding to enable the desired bit socket to be easily selected.

•		
05 003971 001		
0	8740 B HF	1 x 3,0x35,0; 1 x 4,0x35,0; 1 x 5,0x35,0; 1 x 6,0x35,0; 1 x 7,0x38,5; 1 x 8,0x38,5; 1 x 9,0x38,5; 1 x 10,0x38,5
	Belt B 0/8	1 x 45,0x275,0
	Hook and Loop Fastener Strip	1 x 30,0x200,0

New

Belt B 4 Zyklop socket set, 3/, " drive



9-piece; robust textile socket belt, including snap hook to enable secure fastening to a belt loop or pocket. Non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Smooth turning Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the sockets.

9 Zyklop sockets with $^3/_8$ " drive. Take it easy tool finder: Colour coding to enable the desired socket to be easily selected.

•		
05 003973 001		
•	8790 HMB	1 x 8,0x29,0; 1 x 10,0x29,0; 1 x 12,0x29,0; 1 x 13,0x29,0; 1 x 15,0x29,0; 1 x 16,0x30,0; 1 x 17,0x30,0; 1 x 18,0x30,0; 1 x 19,0x30,0
	Belt B 0/9	1 x 45,0x310,0
	Hook and Loop Fastener Strip	1 x 30,0x200,0

Belt B Imperial 1 Zyklop In-Hex-Plus bit socket set with holding function, 3/g drive



8-piece; robust textile socket belt, including snap hook to enable secure fastening to a belt loop or pocket. Non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the sockets.

8 bit sockets for hexagon socket screws with $^3/_8$ " drive with holding function and Hex-Plus high torque geometry. Take it easy tool finder: Colour coding to enable the desired bit socket to be easily selected.

+		
05 003974 001		
0	8740 B HF	1 x 1/8"x35,0; 1 x 9/64"x35,0; 1 x 5/32"x35,0;
		1 x 3/16"x35,0; 1 x 7/32"x35,0; 1 x 1/4"x35,0;
		1 x 5/16"x38,5; 1 x 3/8"x38,5
	Belt B 0/8	1 x 45,0x275,0
	Hook and Loop Fastener Strip	1 x 30,0x200,0

New

Socket rail B (textile belt), 8 location, unloaded



1 robust textile belt, unloaded, for up to 8 sockets and/or bit sockets with $^3/_{\rm g}$ drive. Comes with a snap hook to enable secure fastening to a belt loop or pocket. Nonwoven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the sockets.

05 003980 001		
	Belt B 0/8	1 x 45,0x275,0
	Hook and Loop Fastener Strip	1 x 30,0x200,0

New

Socket rail B (textile belt), 9 location, unloaded



1 robust textile belt, unloaded, for up to 9 sockets and/or bit sockets, with $^3\prime_8$ " drive. Comes with a snap hook to enable secure fastening to a belt loop or pocket. Non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the sockets.

05 003981 001		
	Belt B 0/9	1 x 45,0x310,0
	Hook and Loop Fastener Strip	1 x 30,0x200,0

Tip



Practical nonwoven strips



The textile belt can be attached by means of the nonwoven reverse side and the hook and loop strips e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system.



Secure hold and easy removal



The all new smooth turning mechanism guarantees both secure and rattle-free storage, yet allows easy removal of the tool.

8767 B TORX® HF 1 Zyklop bit socket set with holding function, 3/2" drive









6-piece set

Pouch with 100 mm/107 mm bit sockets

6 Zyklop bit sockets for TORX® screws, with $^3\!/_8$ " drive, with holding function. Take it easy tool finder: Colour coding to enable the desired bit socket to be easily selected.

•		
05 003185 001		
0	8767 B HF	1 x TX 25x107,0; 1 x TX 27x107,0; 1 x TX 30x107,0; 1 x TX 40x107,0; 1 x TX 45x100.0: 1 x TX 50x100.0
		1 X 1X 45X100,0, 1 X 1X 50X100,0

8740 B HF 1 Zyklop bit socket set with holding function,









7-piece set

Pouch with 100 mm/107 mm bit sockets

7 Zyklop bit sockets for hexagon socket screws, with $^3/_8$ " drive, with holding function, Take it easy tool finder: Colour coding to enable the desired bit socket to be easily located.

•		
05 003180 001		
0	8740 B HF	1 x 4,0x107,0; 1 x 5,0x107,0; 1 x 6,0x107,0; 1 x 7,0x100,0; 1 x 8,0x100,0; 1 x 9,0x100,0; 1 x 10.0x100.0

8740 B HF Imperial 1 Zyklop bit socket set with holding function, 3/8" drive











7-piece set

Pouch with 100 mm/107 mm bit sockets

7 Zyklop bit sockets for hexagon socket screws, with $^3\!/_8$ " drive, with holding function, Take it easy tool finder: Colour coding to enable the desired bit socket to be easily located.

•		
05 003181 001		
0	8740 B HF	1 x 1/8"x107,0; 1 x 5/32"x107,0; 1 x 3/16"x107,0; 1 x 7/32"x107,0; 1 x 1/4"x107,0; 1 x 5/16"x100,0; 1 x 3/8"x100,0

8790 HMB HF Zyklop socket with 3/8" drive with holding







Application: Hexagon headed bolts, screws and nuts

Design:

Manual and (non-impact) machine applications, ball intercept ring, knurls at base for precision handling in manual operations, with holding function, chrome vanadium, brushed chromeplated finish. Take it easy tool finder: Colour coding and large stamp to enable the desired socket to be easily located.

-						
	•	Д;		Λ	∐;	
	mm	mm	mm	mm	mm	
05 003740 001	6,0	29,0	10,5	17,5	6,5	
05 003741 001	7,0	29,0	11,2	17,5	6,5	
05 003742 001	8,0	29,0	12,2	17,5	6,5	
05 003743 001	9,0	29,0	13,7	17,5	6,5	
05 003744 001	10,0	29,0	15,0	17,5	8,0	
05 003745 001	11,0	29,0	16,2	17,5	9,5	
05 003746 001	12,0	29,0	17,0	17,5	9,5	
05 003747 001	13,0	29,0	18,4	19,5	9,5	
05 003748 001	14,0	29,0	19,5	21,5	12,5	
05 003749 001	15,0	29,0	21,0	23,5	12,5	
05 003750 001	16,0	29,0	22,2	23,5	12,5	
05 003751 001	17,0	29,0	24,0	23,5	12,5	
05 003752 001	18,0	29,0	24,5	23,5	12,5	
05 003753 001	19,0	29,0	26,0	23,5	12,5	

8740 B HF Zyklop bit socket with holding function, ³/₈"







Application: Hexagon socket screws

Design:

Manual and (non-impact) machine applications, ball intercept ring, knurls at base for precision handling in manual operations, bit sockets with all the advantages of the Wera bit technology, brushed chrome-plated finish, holding function for hexagon socket screws. Take it easy tool finder: Colour coding to enable the desired bit socket to be easily located

						×
	O	∄ ‡		_{	[];	
		mm	mm	mm	mm	
05 003030 001			12,0		9,0	
05 003031 001	-,-	,-	12,0			
05 003032 001	4,0	107,0	12,0	,-		
05 003033 001	5,0	35,0	12,0			
05 003034 001	5,0	107,0	12,0	17,5	81,0	
05 003035 001	6,0	35,0	12,0	17,5	9,0	
05 003036 001	6,0		12,0			
05 003037 001	7,0		12,0	17,5		
05 003038 001	7,0	100,0			74,5	
05 003039 001	8,0	38,5	12,0	17,5	12,5	
05 003040 001	8,0	100,0	12,0	17,5	74,5	
05 003041 001	9,0	38,5	12,0	17,5	12,5	
05 003042 001	9,0	100,0	12,0	17,5	74,5	
05 003043 001	10,0	38,5	12,0	17,5	12,5	
05 003044 001		100,0	12,0	17,5	74,5	
05 003080 001			12,0	17,5	9,0	
05 003081 001	1/8"		12,0	17,5	81,0	
05 003082 001	9/64"	35,0	12,0	17,5	9,0	
05 003083 001	5/_"	35,0	12,0	17,5	9,0	
05 003084 001	5/_"	35,0 107,0	12,0	17,5	81,0	
05 003085 001	3/_"	35,0	12,0	17,5	9,0	
05 003086 001	3/_"	107,0	12,0	17,5	81,0	
05 003087 001	⁷ / ₃₂ "	35,0	12,0	17,5	9,0	
05 003088 001	7/32"	107,0	12,0	17,5	81,0	
05 003089 001	1/4"	35,0	12,0	17,5	9,0	
05 003090 001	1/4"		12,0	17,5	81,0	
05 003091 001			12,0	17,5	12,5	
05 003092 001		100,0	12,0	17,5	74,5	
05 003093 001	3/,"	38,5	12,0	17,5	12,5	
05 003094 001	3/8"	100,0	12,0			

New

8767 B HF TORX® Zyklop bit socket with holding function, 3/8" drive







Application: TORX® socket screws

Design:

Manual and (non-impact) machine applications, ball intercept ring, knurls at base for precision handling in manual operations, bit sockets with all the advantages of the Wera bit technology, brushed chrome-plated finish, holding function for TORX® screws made according to Acument Intellectual Properties specifications. Take it easy tool finder: Colour coding to enable the desired bit socket to be easily located

-						
	0	∄┆		.∐.	<u></u> ;	
		mm	mm	mm	mm	
05 003059 001	TX 10	35,0	12,0	17,5	9,0	
05 003060 001	TX 15	35,0	12,0	17,5	9,0	
05 003061 001	TX 20	35,0	12,0	17,5	9,0	
05 003062 001	TX 25	35,0	12,0	17,5	9,0	
05 003063 001	TX 25	107,0	12,0	17,5	81,0	
05 003064 001	TX 27	35,0	12,0	17,5	9,0	
05 003065 001	TX 27	107,0	12,0	17,5	81,0	
05 003066 001	TX 30	35,0	12,0	17,5	9,0	
05 003067 001	TX 30	107,0	12,0	17,5	81,0	
05 003068 001	TX 40	35,0	12,0	17,5	9,0	
05 003069 001	TX 40	107,0	12,0	17,5	81,0	
05 003070 001	TX 45	38,5	12,0	17,5	12,5	
05 003071 001	TX 45	100,0	12,0	17,5	74,5	
05 003072 001	TX 50	38,5	12,0	17,5	12,5	
05 003073 001	TX 50	100,0	12,0	17,5	74,5	

Tip



Bit sockets with holding function for TORX® screws



The TORX® HF tools developed by Wera excel on account of their geometric optimisation of the original TORX® profile. The wedging forces resulting from the contact pressure between the drive tip and TORX® screw profile (manufactured to the design specified by Acument Intellectual) hold

the screw securely on the tool. This is particularly helpful in difficult-to-access working areas where it is not possible to use a second hand to hold the screw.

967 XL HF TORX® L-key with holding function, long



Application: TORX® socket screws Design: Zinc-phosphated

Holding function for TORX® screws made according to Acument Tip:

Intellectual Properties specifications

	0	L;	L	L;	L	
		mm	mm			
05 024451 001	TX 8	90	16	3 1/2"	5/8"	
05 024452 001	TX 9	101	16	4"	5/8"	
05 024453 001	TX 10	112	19	4 7/ "	3/4"	
05 024454 001	TX 15	123	21	4 7/8"	27/_"	
05 024455 001	TX 20	137	24	5 ³ / ₈ "	1"	
05 024456 001	TX 25	154	27	6 1/,"	1 1/, "	
05 024457 001	TX 27	172	31	6 3/4"	1 1/4"	
05 024458 001	TX 30	195	37	7 11/16"	1 7/16"	
05 024459 001	TX 40	224	42	9"	1 11/, "	

967/9 TX XL 1 TORX® L-key set, long





9-piece set in a two-component clip

Application: TORX® socket screws Design: Zinc-phosphated

 $TORX^{\circledast}$ on short arm, $TORX^{\circledast}$ ball end on long arm, TX 8, TX 9, TX 10: without ball-end at the long arm Tip:

05**024460**001

967 XL TORX® 1 x TX 8x90; 1 x TX 9x101; 1 x TX 10x112 967 PKXL

1 x TX 15x123; 1 x TX 20x137; 1 x TX 25x154; 1 x TX 27x172; 1 x TX 30x195; 1 x TX 40x224 TORX®

967 XL TORX® L-key, long





967/9 TX XL HF 1 L-key set with holding function, long

9-piece set in a two-component clip

Application: TORX® socket screws Zinc-phosphated Blade:

Holding function for TORX $\!\!\!^{\oplus}$ screws made according to Acument Intellectual Properties specifications Design:


05**024450**001 00 967 XL HF 1 x TX 8x90; 1 x TX 9x101; 1 x TX 10x112; TORX® 1 x TX 15x123; 1 x TX 20x137; 1 x TX 25x154; 1 x TX 27x172; 1 x TX 30x195; 1 x TX 40x224



Application: TORX® socket screws Design: Zinc-phosphated Tip: TORX®

	0	Ľ,	Ĺ	Ľ,	Ĺ	
		mm	mm			
05 024461 001	TX 8	90	16	3 1/2"	⁵ / ₈ "	
05 024462 001	TX 9	101	16	4"	5/8"	
05 024463 001	TX 10	112	19	4 7/16"	3/4"	

967 PKXL TORX® L-key, long



Application: TORX® socket screws Design: Zinc-phosphated


Tip: TORX® on short arm, TORX® ball end on long arm

	0	Ľ,	L	Ĺ;	Ĺ	
		mm	mm			
05 024464 001	TX 15	123	21	4 ⁷ / ₈ "	27/_"	
05 024465 001	TX 20	137	24	5 ³ / ₈ "	1"	
05 024466 001	TX 25	154	27	6 1/16"	1 ¹ / ₁₆ "	
05 024467 001	TX 27	172	31	6 3/4"	1 1/4"	
05 024468 001	TX 30	195	37	7 11/, "	1 7/16	
05 024469 001	TX 40	224	42	9"	1 ¹ / ₁₆ "	

967/9 TX XL Multicolour HF 1 L-key set with holding function, long







9-piece set in a two-component clip

Application: TORX® socket screws

Blade: Zinc-phosphated, durable plastic sleeve. The contrasting

inscriptions on the colour-coded sleeves mean that it is easy to recognise the correct sizes and this makes it simpler to find

the right tool.

Holding function for TORX^{\otimes} screws made according to Acument Intellectual Properties specifications Design:

05**024470**001

○ ○ 967 SXL 1 x TX 8x90: 1 x TX 9x101: 1 x TX 10x112: HF TORX® 1 x TX 15x123; 1 x TX 20x137; 1 x TX 25x154; Multicolour 1 x TX 27x172; 1 x TX 30x195; 1 x TX 40x224

967 SXL TORX® L-key Multicolour, long





Application: TORX® socket screws

Design: Zinc-phosphated, durable plastic sleeve. The contrasting

inscriptions on the colour-coded sleeves mean that it is easy to recognise the correct sizes and this makes it simpler to find the right tool.

TORX® Tip:

	0	L; mm	L mm	Ľ;	Ĺ	
05 024481 001	TX 8	90	16	3 1/2"	5/8"	
05 024482 001	TX 9	101	16	4"	5/8"	
05 024483 001	TX 10	112	19	4 7/16"	3/4"	

967 SXL HF TORX® L-key Multicolour with holding function, long



Application: TORX® socket screws

Zinc-phosphated, durable plastic sleeve. The contrasting Design:

inscriptions on the colour-coded sleeves mean that it is easy to recognise the correct sizes and this makes it simpler to find

the right tool.

Tip: Holding function for TORX $\!\!^{\text{\tiny{8}}}$ screws made according to Acument

Intellectual Properties specifications

	0	L;	Ĺ	L;	Ĺ	
		mm	mm			
05 024471 001	TX 8	90	16	3 1/2"	5/8"	
05 024472 001	TX 9	101	16	4"	5/8"	
05 024473 001	TX 10	112	19	4 7/16"	3/4"	
05 024474 001	TX 15	123	21	4 7/8"	²⁷ / ₃₂ "	
05 024475 001	TX 20	137	24	5 3/8"	1"	
05 024476 001	TX 25	154	27	6 1/,"	1 1/, "	
05 024477 001	TX 27	172	31	6 3/4"	1 1/4"	
05 024478 001	TX 30	195	37	7 11/_"	1 7/_"	
05 024479 001	TX 40	224	42	9"	1 11/, "	

967/9 TX XL Multicolour 1 Multicolour L-key set for TORX® screws, long





9-piece set in a two-component clip

Application: TORX® socket screws

Zinc-phosphated, durable plastic sleeve. The contrasting Design: inscriptions on the colour-coded sleeves mean that it is easy

to recognise the correct sizes and this makes it simpler to find

the right tool.

TORX® on short arm, TORX® ball end on long arm, TX 8, TX 9, Tip:

TX 10: without ball-end at the long arm

05 024480 001		
00	967 SXL TORX®	1 x TX 8x90; 1 x TX 9x101; 1 x TX 10x112
	Multicolour	
00	967 SPKXL	1 x TX 15x123; 1 x TX 20x137; 1 x TX 25x154;
	TORX®	1 x TX 27x172; 1 x TX 30x195; 1 x TX 40x224
	Multicolour	

967 SPKXL TORX® L-key Multicolour, long





Application: TORX® socket screws

Design:

Zinc-phosphated, durable plastic sleeve. The contrasting inscriptions on the colour-coded sleeves mean that it is easy to recognise the correct sizes and this makes it simpler to find

the right tool.

TORX® on short arm, TORX® ball end on long arm Tip:

	0	L;	<u>L</u>	L;	L	
		mm	mm			
05 024484 001	TX 15	123	21	4 7/8"	²⁷ / ₃₂ "	
05 024485 001	TX 20	137	24	5 3/8"	1"	
05 024486 001	TX 25	154	27	6 1/16"	1 1/, "	
05 024487 001	TX 27	172	31	6 3/4"	1 1/4"	
05 024488 001	TX 30	195	37	7 11/_"	1 7/16"	
05 024489 001	TX 40	224	42	9"	1 11/, "	

Kraftform Kompakt Micro 21 ESD 1















21-piece set

Pouch with 44 mm bits

1 Kraftform Micro ESD bitholding screwdriver

05 135973 001		
€	1013	1 x 97
	Kraftform	
	Micro ESD	
0	851/9 C	1 x PH 000x44 1); 1 x PH 00x44 1); 1 x PH 0x44 2)
0	867/9 C	1 x TX 1x44; 1 x TX 2x44; 1 x TX 3x44;
	TORX®	1 x TX 4x44; 1 x TX 5x44
0	867/9 C TORX	1 x 1 IPx44; 1 x 2 IPx44; 1 x 3 IPx44;
	PLUS®	1 x 4 IPx44
0	867/9 IPR	1 x 1 IPRx44
	TORX® PLUS	
0	872/9	1 x mx44; 1 x 00x44; 1 x Fx44; 1 x 0x44
•	800/9 C	1 x 0,23x1,5x44; 1 x 0,35x2,5x44
•	869/9	1 x 2,5x44,0

¹⁾ Optimised for Asian PH screws

Kraftform Micro 12 Electronics 1 Screwdriver set for electronic applications















Application: Slotted, Phillips, TORX® BO, TORX PLUS® IPR, Microstix screws

and hexagon headed bolts, screws and nuts. 1 remover.

Content: 12-piece set, in a belt pouch

-		
05 073677 001		
0	2050 PH Micr	o 1 x PH 000x40 ^{1) 2)} ; 1 x PH 00x40 ^{1) 2)} ;
		1 x PH 0x40 ³⁾
•	2067 TORX®	1 x TX 8x60; 1 x TX 10x60
	BO Micro	
0	2067 IPR	1 x 1 IPRx44
	Micro	
•	2035 Micro	1 x 0,23x1,5x40; 1 x 0,35x2,5x40
•	2069 Micro	1 x 2,5x60; 1 x 3,0x60
٥	2072	1 x mx40
•	1429	1 x 1,0x3,5x50

¹⁾ Optimised for Asian PH screws

³⁾ Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)



²⁾ Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

 $^{^{\}rm 2)}$ On the output side, the blade is turned to a nominal length of 10 mm.

Kraftform Kompakt Micro 11 Electronics 1















11-piece set


Pouch with 44 mm bits

1 Kraftform Micro bitholding screwdriver 1013

1013	1 x 97
Kraftform	
Micro	
851/9 C	1 x PH 000x44 1); 1 x PH 00x44 1); 1 x PH 0x44 2
867/9 C	1 x TX 8x44
TORX®	
867/9 C TORX	1 x 3 IPx44
PLUS®	
867/9 IPR	1 x 1 IPRx44
TORX® PLUS	
800/9 C	1 x 0,35x2,5x44
872/9	1 x mx44
869/9	1 x 2,5x44,0; 1 x 3,0x44,0
	Kraftform Micro 851/9 C 867/9 C TORX® 867/9 C TORX PLUS® 867/9 IPR TORX® PLUS 800/9 C 872/9

¹⁾ Optimised for Asian PH screws

²⁾ Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

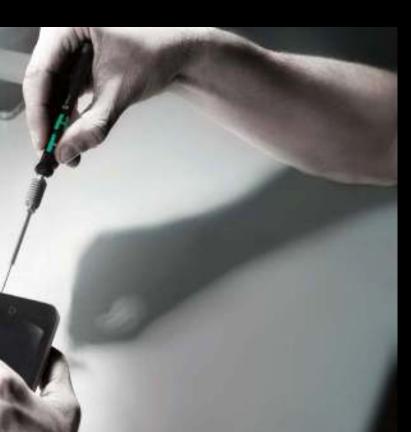

1550/6 ESD Screwdriver set and rack for electronic applications















Application: Slotted, Phillips, TORX PLUS® IPR and Microstix screws

Content: 6-piece set and rack in display carton

•		
05 030180 001		
•	1550 PH Micro	o1 x PH 000x40 ^{1) 2)} ; 1 x PH 00x40 ^{1) 2)} ;
		1 x PH 0x40
•	1578 A Micro	1 x 0,35x2,5x40
0	1567	1 x 1 IPR x 40
0	1572 ESD	1 x mx40

2050/6 Screwdriver set and rack for electronic applications















Application: Slotted, Phillips, TORX PLUS® IPR and Microstix screws

Content: 6-piece set and rack in display carton

-		
05 030181 001		
0	2050 PH Micro	o1 x PH 000x40 1) 2); 1 x PH 00x40 1) 2);
		1 x PH 0x40 ³⁾
0	2067 IPR	1 x 1 IPRx44
	Micro	
٥	2072	1 x mx40
•	2035 Micro	1 x 0.35x2.5x40

¹⁾ Optimised for Asian PH screws

¹⁾ Optimised for Asian PH screws ²⁾ On the output side, the blade is turned to a nominal length of 10 mm.


 $^{^{2)}\,\}mbox{On the output side, the blade is turned to a nominal length of 10 mm.$

³⁾ Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

Belts by Wera



Belt A 1 Zyklop socket set with holding function, 1/4" drive

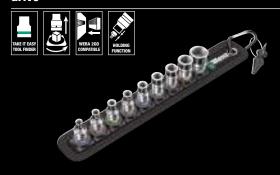

10-piece; robust textile socket belt, including snap hook to enable secure fastening to a belt loop or pocket. Non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the sockets.

9 Zyklop sockets with $^{1}/_{4}$ " drive with fastener holding function. Take it easy tool finder: Colour coding to enable the desired socket to be easily selected. 1 tool for the simple removal of nuts from sockets with holding function.

•		
05 003880 001		
•	8790 HMA HF	1 x 4,0x23,0; 1 x 4,5x23,0; 1 x 5,0x23,0;
		1 x 5,5x23,0; 1 x 6,0x23,0; 1 x 7,0x23,0;
		1 x 8,0x23,0; 1 x 10,0x23,0; 1 x 13,0x23,0
	Nut Extractor	1 x 14,0x43,0
	Belt A 0/9	1 x 39,0x238,0
	Hook and Loop Fastener Strip	1 x 30,0x200,0

Belt A 3 TORX® HF Zyklop bit socket set with holding function, 1/," drive



9-piece; robust textile socket belt, including snap hook to enable secure fastening to a belt loop or pocket. Non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the tool sockets.

9 Zyklop bit sockets for TORX® screws, with $^{1}/_{4}$ " drive, with holding function. Take it easy tool finder: Colour coding to enable the desired bit socket to be easily selected.

+		
05 003882 001		
0	8767 A HF	1 x TX 8x28,0; 1 x TX 9x28,0; 1 x TX 10x28,0;
		1 x TX 15x28,0; 1 x TX 20x28,0; 1 x TX 25x28,0;
		1 x TX 27x28,0; 1 x TX 30x28,0; 1 x TX 40x28,0
	Belt A 0/9	1 x 39,0x238,0
	Hook and Loop Fastener Strip	1 x 30,0x200,0

Belt A 2 Zyklop In-Hex-Plus bit socket set with holding function, 1/4" drive



8-piece; robust textile socket belt, including snap hook to enable secure fastening to a belt loop or pocket. Non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the sockets.

8 bit sockets for hexagon socket screws with $^{1/4}$ " drive with holding function (sizes: 2.0 and 2.5 without holding function) and Hex-Plus high torque geometry. Take it easy tool finder: Colour coding to enable the desired bit socket to be easily selected.

•		
05 003881 001		
0	8740 A	1 x 2,0x28,0; 1 x 2,5x28,0
0	8740 A HF	1 x 3,0x28,0; 1 x 4,0x28,0; 1 x 5,0x28,0;
		1 x 6,0x28,0; 1 x 7,0x28,0; 1 x 8,0x28,0
	Belt A 0/8	1 x 39,0x220,0
	Hook and Loop Fastener Strip	1 x 30,0x200,0

Belt A 4 Zyklop socket set, 1/," drive



9-piece; robust textile socket belt, including snap hook to enable secure fastening to a belt loop or pocket. Non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Smooth turning Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the sockets.

9 Zyklop sockets with $^{1}\!\!/_4$ " drive. Take it easy tool finder: Colour coding to enable the desired socket to be easily selected.

•		
05 003883 001		
•	8790 HMA	1 x 5,0x23,0; 1 x 5,5x23,0; 1 x 6,0x23,0;
		1 x 7,0x23,0; 1 x 8,0x23,0; 1 x 10,0x23,0;
		1 x 11,0x23,0; 1 x 12,0x23,0; 1 x 13,0x23,0
	Belt A 0/9	1 x 39,0x238,0
	Hook and Loop Fastener Strip	1 x 30,0x200,0

950/9 Hex-Plus Multicolour 1 SB Multicolour L-key set, metric, BlackLaser









9-piece set in a two-component clip

Application: Hexagon socket screws

Design: BlackLaser surface, durable plastic sleeve. The contrasting

inscriptions on the colour-coded sleeves mean that it is easy to recognise the correct sizes and this makes it simpler to find

the right tool.

Tip: Hex-Plus, ball-end hexagon on long arm

950/9 Hex-Plus 1 SB L-key set, metric, chrome-plated





9-piece set in a two-component clip

Application: Hexagon socket screws

Design: Chrome-plated

Tip: Hex-Plus, ball-end hexagon on long arm

1) Regular hexagon

950/9 Hex-Plus 6 SB L-key set, metric, BlackLaser





9-piece set in a two-component clip

Application: Hexagon socket screws

Design: BlackLaser surface

Tip: Hex-Plus, ball-end hexagon on long arm

950/9 Hex-Plus Multicolour HF 1 L-key set, metric, BlackLaser, with holding function











9-piece set in a two-component clip

Application: Hexagon socket screws

Design: BlackLaser surface, durable plastic sleeve. The contrasting inscriptions on the colour-coded sleeves mean that it is easy

inscriptions on the colour-coded sleeves mean that it is easy to recognise the correct sizes and this makes it simpler to find

the right tool.

Tip: Hex-Plus, ball-end hexagon on long arm, holding function for

hexagon socket screws, sizes: 1,5, 2,0 and 2,5 without holding

function

¹⁾ Regular hexagon



A small step for Wera tool sets. A great step for mankind.

Wera 2go 2 Tool Container



1 dimensionally stable, robust Tool Container with hook and loop fastener system for the attachment of other Wera 2go components as well as Wera textile boxes and pouches with hook and loop fastener zones; high resistance against cuts and stabs; 1 handle and 1 Shoulder Strap with adjustable-width padding, adjustable in length, detachable; 1 removable Tool Quiver with handle and a variable hook and loop fastener partition for a division into as many as 5 inner sections.

Wera 2go 3 Tool Box



1 dimensionally stable and robust Tool Box, empty, equipped with handle for the storage and transport of tools and small parts; high resistance against cuts and stabs; comes with hook and loop fastener zone for docking with the Wera 2go system.





Joker Set of ratcheting combination wrenches SB













Set of ratcheting combination wrenches 4-piece set Durable pouch

Joker Set of ratcheting combination wrenches











Set of ratcheting combination wrenches 11-piece set Durable pouch

Joker Switch Set of ratcheting combination wrenches





Set of ratcheting combination wrenches, reversible 4-piece set
Durable pouch

Joker Switch Set of ratcheting combination wrenches





Set of ratcheting combination wrenches, reversible 11-piece set Durable pouch

Tip

Angled ratchet end



The ratchet end is angled at 15° to the tool axis, making application of the tool in confined spaces much easier.



Joker Switch



The direction of the finetooth ratchet mechanism can easily be changed via the smooth switch lever.



Holding function



The Joker's holding function means that nuts and bolts can be held in the jaw and easily positioned where they are needed. Fastening on to the thread can then be done quickly and safely, thanks to the innovative special stopplate which holds the fastener. No more time-wasting searches for dropped nuts and bolts!



Limit-stop



Constantly slipping over bolt heads? Using your thumb to try to stop this slipping? Difficulty holding fasteners in confined spaces? Easing off early, to avoid risks of injury or damage? That was yesterday.

Today, the Joker prevents slips with it's integrated stop-plate, making use vastly easier and allowing significantly more force to be applied.

3950/9 Hex-Plus Multicolour Stainless 1 L-key set, metric, stainless









9-piece set in a two-component clip

Application: Hexagon socket screws

Stainless steel, durable plastic sleeve. The contrasting Design:

inscriptions on the colour-coded sleeves mean that it is easy to recognise the correct sizes and this makes it simpler to find

the right tool.

Hex-Plus, ball-end hexagon on long arm Tip:

8006 SC 1 Zyklop Hybrid Ratchet Set, 1/2" drive, metric











13-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Hybrid Ratchet with 1/2 drive, 10 Zyklop sockets with holding function, 1 Zyklop Hybrid Extension with release pin, 1 Zyklop extension (long) with free-turning sleeve

967/9 TX Multicolour HF 1 L-key set with holding function







9-piece set in a two-component clip

TORX® socket screws **Application:**

Blade: Round

Design:

 $\label{thm:continuous} \begin{tabular}{l} Holding function for TORX @ screws made according to Acument Intellectual Properties specifications, BlackLaser surface, \end{tabular}$ durable plastic sleeve. The contrasting inscriptions on the colour-coded sleeves mean that it is easy to recognise the correct sizes and this makes it simpler to find the right tool.

8006 C Zyklop Hybrid Ratchet with switch lever and 1/2" drive







Application:

1/2" square sockets as well as for 1/2" adaptors with square drive, with ball locking device

Design:

Fine-tooth mechanism with 72 teeth for a return angle of only 5°; switch lever for convenient change of direction;

secure socket locking function

Handle:

Multi-component Kraftform handle for optimum pressure and tensile loads, handle end designed for connection of

Zyklop Hybrid extension 8797 C







8100 SA 6 Zyklop Speed Ratchet Set, 1/4" drive, metric













28-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Speed Ratchet with 1/4 drive, 9 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 15 bits

•		
05 004016 001		
0	8000 A	1 x 1/4"x152,0
•	8790 HMA	1 x 5,0x23,0; 1 x 5,5x23,0; 1 x 6,0x23,0;
		1 x 7,0x23,0; 1 x 8,0x23,0; 1 x 10,0x23,0;
		1 x 11,0x23,0; 1 x 12,0x23,0; 1 x 13,0x23,0
	8794 LA	1 x 1/4"x150,0
	8794 A	1 x 1/4"x56,0
• •	8784 A1	1 x 1/4"x1/4"x37,0
•	851/4 TZ PH	1 x PH 1x50; 1 x PH 2x50; 1 x PH 3x50
0	855/4 TZ PZ	1 x PZ 1x50; 1 x PZ 2x50
0	867/4 Z	1 x TX 10x50; 1 x TX 15x50; 1 x TX 20x50;
	TORX®	1 x TX 25x50; 1 x TX 27x50; 1 x TX 30x50
0	840/4 Z Hex-	1 x 3,0x50; 1 x 4,0x50; 1 x 5,0x50; 1 x 6,0x50
	Plus	

8100 SB 6 Zyklop Speed Ratchet Set, 3/8" drive, metric















29-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Speed Ratchet with $^3/_8{}^{\rm s}$ drive, 9 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 16 bits

•		
05 004046 001		
0	8000 B	1 x 3/8"x199,0
•	8790 HMB	1 x 8,0x29,0; 1 x 10,0x29,0; 1 x 12,0x29,0;
		1 x 13,0x29,0; 1 x 15,0x29,0; 1 x 16,0x30,0;
		1 x 17,0x30,0; 1 x 18,0x30,0; 1 x 19,0x30,0
●0	8794 LB	1 x 3/8"x200,0
	8794 B	1 x 3/8"x76,0
•	8784 B1	1 x 1/4"x3/8"x44,0
0	851/4 TZ PH	1 x PH 1x50; 1 x PH 2x50; 1 x PH 3x50
0	855/4 TZ PZ	1 x PZ 1x50; 1 x PZ 2x50; 1 x PZ 3x50
0	867/4 Z	1 x TX 20x50; 1 x TX 25x50; 1 x TX 27x50;
	TORX®	1 x TX 30x50; 1 x TX 40x50
0	840/4 Z Hex-	1 x 4,0x50; 1 x 5,0x50; 1 x 6,0x50; 1 x 8,0x50
	Plus	
•	800/4 Z	1 x 1,0x5,5x50

8100 SC 6 Zyklop Speed Ratchet Set, 1/2" drive, metric















28-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Speed Ratchet with $^{1}\!/_{_{2}}$ drive, 10 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 14 bits

05 004076 001		
0	8000 C	1 x 1/2"x277,0
•	8790 HMC	1 x 10,0x37,0; 1 x 11,0x37,0; 1 x 12,0x37,0;
		1 x 13,0x37,0; 1 x 14,0x37,0; 1 x 15,0x37,0;
		1 x 16,0x37,0; 1 x 17,0x37,0; 1 x 18,0x37,0;
		1 x 19,0x37,0
	8794 LC	1 x 1/2"x250,0
	8794 C	1 x 1/2"x52,0
•	8784 C2	1 x 5/16"x1/2"x50,0
0	851/2 Z PH	1 x PH 2x32; 1 x PH 3x32
0	855/2 Z PZ	1 x PZ 2x32; 1 x PZ 3x32
0	867/2 Z	1 x TX 20x35; 1 x TX 25x35; 1 x TX 30x35;
	TORX®	1 x TX 40x35; 1 x TX 45x35; 1 x TX 50x35
0	840/2 Z	1 x 5x30; 1 x 6x30; 1 x 8x30; 1 x 10x30

8000 A SB Zyklop Speed Ratchet with 1/4" drive











Application: 1/4" square sockets and 1/4" adaptors with square drive, equipped with ball lock

Flywheel design and easy-to-grip free-turning sleeve for faster work, swivel ratchet head, defined lock positions at 0° and 90° Design:

to the left and right as well as at 15° before 90° inwards, at 0° it can be used like a conventional screwdriver, pushbutton release, left/right switchover, fine-tooth design, small return

angle of 5°

Handle: Multi-component Kraftform handle ensures minimum fatigue

•				4013288
05 073260 001	8000 A	0	1 x 1/4"x152.0	128034

8000 B SB Zyklop Speed Ratchet with 3/, " drive











³/₈" square drive sockets and ³/₈" adaptors with square drive, Application: equipped with ball lock

Design:

Flywheel design and easy-to-grip free-turning sleeve for faster work, swivel ratchet head, defined lock positions at 0° and 90° to the left and right as well as at 15° before 90° inwards, at 0° it can be used like a conventional screwdriver, pushbutton release, left/right switchover, fine-tooth design, small return angle of 5°

Handle:##e_ b## Multi-component Kraftform handle ensures minimum fatigue

•			4013288
05 073261 001	8000 B	• 1 x 3/8"x199.0	128041

8000 C SB Zyklop Speed Ratchet with 1/2" drive



Design:







Application: $^{1}\!/_{2}$ " square drive sockets and $^{1}\!/_{2}$ " adapters with square drive, equipped with ball lock

Flywheel design and easy-to-grip free-turning sleeve for faster work, swivel ratchet head, defined lock positions at 0° and 90° to the left and right as well as at 15° before 90° inwards, at 0° it can be used like a conventional screwdriver, pushbutton release, left/right switchover, fine-tooth design, small return angle of 5°

Handle: Multi-component Kraftform handle ensures minimum fatigue

-			4013288
05 073262 001	8000 C	• 1 x 1/2"x277.0	128058

Tip



Unbelievably



The Zyklop Speed ratchets are really fast movers. The gyrating mass design means that screwdriving is accelerated. The rotation-symmetric structure of the Kraftform handle and the free-turning sleeve reinforce this rapid twisting process, particularly when the ratchet does not engage due to too little resistance in the thread.



Ratchet head pivots freely



The ratchet head pivots freely and can be locked into any position by using the slide switch that is positioned on either side. It is even possible to work in very confined and difficult-to-access areas with enhanced hand clearance.

8003 A Zyklop Metal Ratchet with push-through square and 1/," drive



Design:



Application: 1/4" square sockets as well as for 1/4" adaptors with square drive, with ball locking device

Forged, full metal ratchet (chrome-molybdenum) that is extremely robust with a long service life; slim design to enable work in very confined spaces; the dual-ratchet-teeth design means that a 76 fine-toothing division can be achieved from the 38 robust teeth with a return angle of only 4.7°; simple direction change with the undetachable push-through square and very secure socket lock mechanism

•						
	0	8:	יון"	(a)		
		mm	mm	mm		
05 004003 001	1/4"	141,0	21	22		

8003 C Zyklop Metal Ratchet with push-through square and 1/2" drive



Design:



Application: $\frac{1}{2}$ square sockets as well as for $\frac{1}{2}$ adaptors with square

drive, with ball locking device

Forged, full metal ratchet (chrome-molybdenum) that is extremely robust with a long service life; slim design to enable work in very confined spaces; the dual-ratchet-teeth design means that a 76 fine-toothing division can be achieved from the 38 robust teeth with a return angle of only 4.7°; simple direction change with the undetachable push-through square and very secure socket lock mechanism

-					
	0	8,	*D-	(
		mm	mm	mm	
05 004063 001	1/_"	281,0	36	37	

8003 B Zyklop Metal Ratchet with push-through square and 3/," drive



Design:



Application: $^{3}/_{8}$ " square sockets as well as for $^{3}/_{8}$ " adaptors with square drive, with ball locking device

Forged, full metal ratchet (chrome-molybdenum) that is extremely robust with a long service life; slim design to enable work in very confined spaces; the dual-ratchet-teeth design means that a 76 fine-toothing division can be achieved from the 38 robust teeth with a return angle of only 4.7°; simple direction change with the undetachable push-through square and very secure socket lock mechanism

05**004033**001 3/8" 222,0 27 29

8100 SA 7 Zyklop Metal Ratchet Set with push-through square, 1/4" drive, metric





28-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Metal Ratchet with push-through square and $^{1}/_{4}$ " drive, 9 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 15 bits

•		
05 004017 001		
0	8003 A	1 x 1/4"x141,0
•	8790 HMA	1 x 5,0x23,0; 1 x 5,5x23,0; 1 x 6,0x23,0;
		1 x 7,0x23,0; 1 x 8,0x23,0; 1 x 10,0x23,0;
		1 x 11,0x23,0; 1 x 12,0x23,0; 1 x 13,0x23,0
●0	8794 LA	1 x 1/4"x150,0
	8794 A	1 x 1/4"x56,0
• •	8784 A1	1 x 1/4"x1/4"x37,0
0	851/1 Z PH	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25
0	855/1 Z PZ	1 x PZ 1x25; 1 x PZ 2x25
0	867/1 TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25;
		1 x TX 25x25; 1 x TX 27x25; 1 x TX 30x25
0	840/1 Z Hex-	1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25
	Plus	

8100 SB 7 Zyklop Metal Ratchet Set with push-through square, ³/_o" drive, metric













29-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Metal Ratchet with $^3/_8$ " drive, 9 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 16 bits

•		
05 004047 001		
0	8003 B	1 x 3/8"x222,0
•	8790 HMB	1 x 8,0x29,0; 1 x 10,0x29,0; 1 x 12,0x29,0;
		1 x 13,0x29,0; 1 x 15,0x29,0; 1 x 16,0x30,0;
		1 x 17,0x30,0; 1 x 18,0x30,0; 1 x 19,0x30,0
●0	8794 LB	1 x 3/8"x200,0
●0	8794 B	1 x 3/8"x76,0
•	8784 B1	1 x 1/4"x3/8"x44,0
0	851/1 Z PH	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25
0	855/1 Z PZ	1 x PZ 1x25; 1 x PZ 2x25
0	867/1 TORX®	1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25;
		1 x TX 27x25; 1 x TX 30x25; 1 x TX 40x25
0	840/1 Z Hex-	1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25;
	Plus	1 x 8,0x25

8100 SC 7 Zyklop Metal Ratchet Set with push-through square, 1/," drive, metric













28-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Metal Ratchet with push-through square and $^{1}/_{2}$ " drive, 10 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 14 bits

•		
05 004077 001		
0	8003 C	1 x 1/2"x281,0
•	8790 HMC	1 x 10,0x37,0; 1 x 11,0x37,0; 1 x 12,0x37,0;
		1 x 13,0x37,0; 1 x 14,0x37,0; 1 x 15,0x37,0;
		1 x 16,0x37,0; 1 x 17,0x37,0; 1 x 18,0x37,0;
		1 x 19,0x37,0
	8794 LC	1 x 1/2"x250,0
	8794 C	1 x 1/2"x52,0
•	8784 C2	1 x 5/16"x1/2"x50,0
0	851/2 Z PH	1 x PH 2x32; 1 x PH 3x32
0	867/2 Z	1 x TX 20x35; 1 x TX 25x35; 1 x TX 27x35;
	TORX®	1 x TX 30x35; 1 x TX 40x35; 1 x TX 45x35;
		1 x TX 50x35; 1 x TX 55x35
0	840/2 Z	1 x 5x30; 1 x 6x30; 1 x 8x30; 1 x 10x30

Tip



Zyklop Metal Ratchet



With an incredibly slimline design, this forged, full metal ratchet is manufactured from ultra-tough chrome-molybdenum. The slim design is ideal for working in confined spaces.



The Zyklop Metal Push



Smooth push-through mechanism, that cannot get lost.



Small return angle



The innovative dual-ratchet design means that an ultra-fine 76 tooth action can be achieved with the 38 robust teeth. With a return angle of only 4.7°.



Ball lock



The ball lock holds the sockets and attachments securely, ensuring safe working and no loss of accessories when working in limited-access situations, such as car engine bays.

8004 A Zyklop Metal Ratchet with switch lever and 1/4"





Application: 1/4" square sockets as well as for 1/4" adaptors with square

drive, with ball locking device

Design: Forged, full metal ratchet (chrome-molybdenum) that is extremely robust with a long service life; slim design to

enable work in very confined spaces; fine-tooth mechanism with 72 teeth for a return angle of only 5°; switch lever for convenient change of direction; secure socket locking

•					
	0	8.	D.	(a)	
		mm	mm	mm	
05 004004 001	1/4"	141,0	19	22	

8004 C Zyklop Metal Ratchet with switch lever and 1/2"





 $^{1}/_{2}$ " square sockets as well as for $^{1}/_{2}$ " adaptors with square **Application:**

drive, with ball locking device

Forged, full metal ratchet (chrome-molybdenum) that is Design: extremely robust with a long service life; slim design to enable work in very confined spaces; fine-tooth mechanism with 72 teeth for a return angle of only 5°; switch lever

for convenient change of direction; secure socket locking

function

•						
	0	8.	'D	(iii)		
		mm	mm	mm		
05 004064 001	1/_"	281,0	34	37		

8004 B Zyklop Metal Ratchet with switch lever and 3/8" drive





 $^{3}\!/_{8}$ " square sockets as well as for $^{3}\!/_{8}$ " adaptors with square **Application:**

drive, with ball locking device

Design: Forged, full metal ratchet (chrome-molybdenum) that is extremely robust with a long service life; slim design to enable work in very confined spaces; fine-tooth mechanism with 72 teeth for a return angle of only 5°; switch lever for convenient change of direction; secure socket locking

function

	0	8.	, p ₁ ,	(a)	
		mm	mm	mm	
05 004034 001	3/8"	222,0	26	29	

8100 SA 8 Zyklop Metal Ratchet Set with switch lever, ¹/₄" drive, metric





28-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Metal Ratchet with switch lever and $^{1/}_{4}$ " drive, 9 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 15 bits

+		
05 004018 001		
0	8004 A	1 x 1/4"x141,0
•	8790 HMA	1 x 5,0x23,0; 1 x 5,5x23,0; 1 x 6,0x23,0;
		1 x 7,0x23,0; 1 x 8,0x23,0; 1 x 10,0x23,0;
		1 x 11,0x23,0; 1 x 12,0x23,0; 1 x 13,0x23,0
●0	8794 LA	1 x 1/4"x150,0
	8794 A	1 x 1/4"x56,0
•	8784 A1	1 x 1/4"x1/4"x37,0
0	851/1 Z PH	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25
0	855/1 Z PZ	1 x PZ 1x25; 1 x PZ 2x25
0	867/1 TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25;
		1 x TX 25x25; 1 x TX 27x25; 1 x TX 30x25
0	840/1 Z Hex-	1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25
	Plus	

8100 SB 8 Zyklop Metal Ratchet Set with switch lever, ³/₆" drive, metric



29-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Metal Ratchet with $^3/_8$ " drive, 9 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 16 bits

05 004048 001		
0	8004 B	1 x 3/8"x222,0
•	8790 HMB	1 x 8,0x29,0; 1 x 10,0x29,0; 1 x 12,0x29,0;
		1 x 13,0x29,0; 1 x 15,0x29,0; 1 x 16,0x30,0;
		1 x 17,0x30,0; 1 x 18,0x30,0; 1 x 19,0x30,0
●0	8794 LB	1 x 3/8"x200,0
	8794 B	1 x 3/8"x76,0
•	8784 B1	1 x 1/4"x3/8"x44,0
0	851/1 Z PH	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25
0	855/1 Z PZ	1 x PZ 1x25; 1 x PZ 2x25
0	867/1 TORX®	1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25;
		1 x TX 27x25; 1 x TX 30x25; 1 x TX 40x25
0	840/1 Z Hex-	1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25;
	Plus	1 x 8,0x25

8100 SC 8 Zyklop Metal Ratchet Set with switch lever, 1/2" drive, metric





 $28\hbox{-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility}\\$

1 Zyklop Metal Ratchet with switch lever and $^{1/}_{2}$ " drive, 10 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 14 bits

•		
05 004078 001		
0	8004 C	1 x 1/2"x281,0
•	8790 HMC	1 x 10,0x37,0; 1 x 11,0x37,0; 1 x 12,0x37,0;
		1 x 13,0x37,0; 1 x 14,0x37,0; 1 x 15,0x37,0;
		1 x 16,0x37,0; 1 x 17,0x37,0; 1 x 18,0x37,0;
		1 x 19,0x37,0
	8794 LC	1 x 1/2"x250,0
	8794 C	1 x 1/2"x52,0
•	8784 C2	1 x 5/16"x1/2"x50,0
0	851/2 Z PH	1 x PH 2x32; 1 x PH 3x32
0	867/2 Z	1 x TX 20x35; 1 x TX 25x35; 1 x TX 27x35;
	TORX®	1 x TX 30x35; 1 x TX 40x35; 1 x TX 45x35;
		1 x TX 50x35; 1 x TX 55x35
0	840/2 Z	1 x 5x30; 1 x 6x30; 1 x 8x30; 1 x 10x30

Tip



Zyklop Metal Ratchet



With an incredibly slimline design, this forged, full metal ratchet is manufactured from ultra-tough chrome-molyb-denum. The slim design is ideal for working in confined spaces.



Zyklop Metal Switch



Switch lever for convenient change of direction, even during use.



Small return angle



Ultra-fine mechanism with 72 teeth for a return angle of only 5°. This short stroke allows fast and precise work in all types of installation.



Ball lock



The ball lock holds the sockets and attachments securely, ensuring safe working and no loss of accessories when working in limited-access situations, such as car engine bays.

Tool-Check PLUS













28 bits, 1 hand holder 813 suitable for the attachment of bits with ${}^{1}\!/_{4}$ "hexagon drive as per DIN ISO 1173-C 6.3 and Wera connection series 1, 1 Rapidaptor bit holder, 1 adaptor 870/1 (${}^{1}\!/_{4}$ "hexagon to ${}^{1}\!/_{4}$ "square), 7 sockets (${}^{1}\!/_{4}$ "); 1 Wera Bit Ratchet, drop-forged full steel design suitable for the attachment of bits with ${}^{1}\!/_{4}$ "hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 and Wera connection series 1 and 4; the use of ${}^{1}\!/_{4}$ "sockets is also possible with the application of the Wera adaptor 870/1

•		
05 056490 001		
	8001 A	1 x 1/4"x87,0
•	813	1 x 1/4"x78
●0	889/4/1 K	1 x 1/4"x50
00	870/1	1 x 1/4"x25 ¹⁾
•	8790 HMA	1 x 5,5x23,0; 1 x 6,0x23,0; 1 x 7,0x23,0;
		1 x 8,0x23,0; 1 x 10,0x23,0; 1 x 12,0x23,0;
		1 x 13,0x23,0
0	851/1 TZ PH	2 x PH 1x25; 3 x PH 2x25; 1 x PH 3x25
0	855/1 TH PZ	1 x PZ 1x25; 3 x PZ 2x25; 1 x PZ 3x25
0	867/1 TZ	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25;
	TORX®	1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25
•	867/1 Z	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25;
	TORX® BO	1 x TX 25x25; 1 x TX 30x25
0	840/1 Z Hex-	1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25;
	Plus	1 x 8,0x25
•	800/1 TZ	1 x 1,0x5,5x25

¹⁾ With friction ball; for manual nut spinner sockets

Kraftform Kompakt 60













Pouch with 89 mm bits

17-piece set

1 Kraftform bitholding screwdriver 816 R with Rapidaptor quick-release chuck

•		
05 059295 001		
•	816 R	1 x 1/4"x119
0	851/4 Z PH	1 x PH 1x89; 1 x PH 2x89; 1 x PH 3x89
0	855/4 Z PZ	1 x PZ 1x89; 1 x PZ 2x89; 1 x PZ 3x89
•	867/4 Z	1 x TX 10x89; 1 x TX 15x89; 1 x TX 20x89;
	TORX® BO	1 x TX 25x89; 1 x TX 30x89
•	800/4 Z	1 x 1,0x5,5x89
0	840/4 Z Hex-	1 x 3,0x89; 1 x 4,0x89; 1 x 5,0x89; 1 x 6,0x89
	Plus	

Kraftform Micro 12 Universal 1 Screwdriver set for electronic applications















Application: Slotted and Phillips screws, TORX® socket screws, and

Hexagon socket screws

Content: 12-piece set, in a belt pouch

•		
05 073675 001		
•	2050 PH Micr	o 1 x PH 00x60 ¹⁾ ; 1 x PH 0x60 ²⁾
٥	2067 TORX® HF	1 x TX 5x40; 1 x TX 6x40
•	2035 Micro	1 x 0,23x1,5x40; 1 x 0,30x1,8x60; 1 x 0,40x2,0x60; 1 x 0,40x2,5x80; 1 x 0,50x3,0x80
0	2054 Micro	1 x 0,9x40; 1 x 1,5x60; 1 x 2x60

1) Optimised for Asian PH screws

Bit-Check 30 Metal 1





1 universal bit holder with stainless steel sleeve, retaining ring, and strong permanent magnet, 29 bits, tough (Z), for universal use.

05 057434 001		
●0	899/4/1	1 x 899/4/1 K, 1/4"x50
0	851/1 Z PH	3 x PH 1x25; 3 x PH 2x25; 2 x PH 3x25
0	855/1 Z PZ	3 x PZ 1x25; 3 x PZ 2x25; 3 x PZ 3x25
0	867/1 TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25;
		1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25
•	800/1 Z	1 x 0,6x4,5x25; 1 x 1,0x5,5x25; 1 x 1,2x6,5x25
0	840/1 Z Hex-	1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25
	Plus	

²⁾ Size 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)

Bit-Check 30 TX Universal 1



1 universal bit holder with stainless steel sleeve, retaining ring, and strong permanent magnet,29 bits, tough, for universal use.

05 057432 001		
03037432001		
●0	899/4/1	1 x 899/4/1 K, 1/4"x50
0	851/1 Z PH	1 x PH 2x25
0	855/1 Z PZ	2 x PZ 1x25; 5 x PZ 2x25; 2 x PZ 3x25
0	867/1 TORX®	3 x TX 10x25; 4 x TX 15x25; 4 x TX 20x25;
		4 x TX 25x25; 3 x TX 30x25; 1 x TX 40x25



1 universal bit holder with stainless steel sleeve, retaining ring, and strong permanent magnet, 29 bits, tough, for universal use.

05 057908 001		
●0	899/4/1	1 x 899/4/1 K, 1/4"x50
0	867/1 TORX®	3 x TX 10x25; 5 x TX 15x25; 8 x TX 20x25;
		7 x TX 25x25; 4 x TX 30x25; 2 x TX 40x25

Bit-Check 30 BiTorsion 1









1 bit holder Rapidaptor with quick-release chuck, 29 BiTorsion bits for long service life, tough, for universal use. The "Take it easy" Bit-Checks have bits with a sleeve which – from its colour and size designation – make it simple to access the right bit quickly.

•		
05 057430 001		
●0	889/4/1 K	1 x 1/4"x50
•	851/1 BTZ PH	2 x PH 1x25; 5 x PH 2x25; 2 x PH 3x25
0	855/1 BTZ PZ	2 x PZ 1x25; 6 x PZ 2x25; 2 x PZ 3x25
0	867/1 TORX®	1 x TX 10x25; 2 x TX 15x25; 2 x TX 20x25;
	BTZ	2 x TX 25x25; 2 x TX 30x25; 1 x TX 40x25

Bit-Safe Classic 10





1 universal bit holder with stainless steel sleeve, retaining ring, and strong permanent magnet, 36 bits, Torsion-style (T) design to reduce premature wear, tough (Z), for universal use.

05 057910 001		
●0	899/4/1	1 x 899/4/1 K, 1/4"x50
0	867/1 TORX®	3 x TX 10x25; 4 x TX 15x25; 4 x TX 20x25;
		4 x TX 25x25; 4 x TX 30x25; 1 x TX 40x25
0	851/1 Z PH	1 x PH 2x25
0	855/1 Z PZ	2 x PZ 1x25; 5 x PZ 2x25; 2 x PZ 3x25
0	851/4 TZ PH	1 x PH 2x50
0	855/4 TZ PZ	1 x PZ 1x50; 1 x PZ 2x50
0	867/4 Z TORX®	1 x TX 20x50; 1 x TX 25x50; 1 x TX 30x50



Really simple

The first screwdrivers with "Take it easy" tool finder

Kraftform 2go 300













- 11 Kraftform screwdrivers, Series 300 for cross recess screws Phillips and Pozidriv, TORX® and slotted screws. "Take it easy" tool finder: colour coding according to profile and size stamp.
- 1 dimensionally stable and robust Tool Quiver, equipped with handle for the storage and transport of tools; high resistance against cuts and stabs; comes with hook and loop fastener zone for docking with the Wera 2go system and includes 1 variably adjustable hook and loop fastener partition for a division into as many as 5 sections.

•		
05 004313 001		
	Wera 2go 4	1 x 165,0x165,0x105
0	350 PH	1 x PH 1x80; 1 x PH 2x100
0	355 PZ	1 x PZ 1x80; 1 x PZ 2x100
0	367 TORX®	1 x TX 10x80; 1 x TX 15x80; 1 x TX 20x100;
		1 x TX 25x100; 1 x TX 30x115
•	334 SK	1 x 0,8x4,5x90; 1 x 1,2x7,0x125
	Hook and Loop Fastener Strip	1 x 50,0x120,0



Kraftform 2go 100















- 11 VDE-insulated, Kraftform screwdrivers for cross recess screws Phillips and Pozidriv, TORX® and slotted screws. "Take it easy" tool finder: colour coding according to profile and size stamp.
- 1 dimensionally stable and robust Tool Quiver, equipped with handle for the storage and transport of tools; high resistance against cuts and stabs; comes with hook and loop fastener zone for docking with the Wera 2go system and includes 1 variably adjustable hook and loop fastener partition for a division into as many as 5 sections.

•		
05 004310 001		
	Wera 2go 4	1 x 165,0x165,0x105
0	162 i PH VDE	1 x PH 1x80; 1 x PH 2x100
0	165 i PZ VDE	1 x PZ 1x80; 1 x PZ 2x100
0	167 i TORX®	1 x TX 10x80; 1 x TX 15x80; 1 x TX 20x80
	VDE	
•	160 i VDE	1 x 0,4x2,5x80 ¹⁾ ; 1 x 0,8x4,0x150;
		1 x 1,0x5,5x200
•	160 iS	1 x 0,6x3,5x100
	Hook and Loop Fastener Strip	1 x 50,0x120,0

¹⁾ without Lasertip

Tip


Screwdrivers with "Take it easy" tool finder





"Take it easy" tool finder: colour coding according to profile and size stamp.

Kraftform Big Pack 300

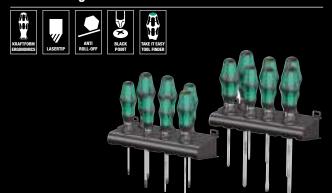

Kraftform Plus – Series 300. With Lasertip blade, voltage tester and rack. "Take it easy" tool finder: colour coding according to profile and size stamp.

Application: Slotted, cross, Phillips-Recess, Pozidriv and TORX® screws

Content: 14-piece set in display carton

05 105630 001		
0	350 PH	1 x PH 1x80; 1 x PH 2x100; 1 x PH 3x150
0	355 PZ	1 x PZ 1x80; 1 x PZ 2x100; 1 x PZ 3x150
0	367 TORX®	1 x TX 10x80; 1 x TX 15x80; 1 x TX 20x100;
		1 x TX 25x100; 1 x TX 30x115
•	334	1 x 1,2x6,5x150
•	335	1 x 0,6x3,5x100; 1 x 0,8x4,0x100
	Rack	2 x 190,0x50,0

334/6 Rack screwdriver set Kraftform Plus Lasertip and rack









Lasertip round blades and rack. "Take it easy" tool finder: colour coding according to profile and size stamp.

Application: Slotted and Phillips screws

Content: 6-piece set and rack in display carton

•		
05 105650 001		
0	350 PH	1 x PH 1x80; 1 x PH 2x100
•	334	1 x 1,2x6,5x150
•	335	1 x 0,5x3,0x80 ¹⁾ ; 1 x 0,8x4,0x100;
		1 x 1,0x5,5x125

1) without Lasertip

пр



Lasertip



The tips of Wera Lasertip screwdrivers are microscopically laser-roughened. This rough surface literally 'bites' into screwheads, preventing slips.



Wera Lasertip reduces the contact pressure required and enhances force transfer — meaning less screwdriving effort is required.

Screwdriving becomes safer and easier.

334/355/6 Rack screwdriver set Kraftform Plus Lasertip and rack











Lasertip round blades and rack. "Take it easy" tool finder: colour coding according to profile and size stamp.


Application: Slotted and Pozidriv screws

Content: 6-piece set and rack in display carton

05 105656 001		
0	355 PZ	1 x PZ 1x80; 1 x PZ 2x100
•	334	1 x 1,2x6,5x150
•	335	1 x 0,5x3,0x80 ¹⁾ ; 1 x 0,8x4,0x100;
		1 x 1,0x5,5x125

1) without Lasertip

Kraftform Big Pack 100 VDE

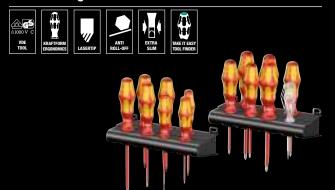

Kraftform: The safety screwdriver with Lasertip blade, voltage tester and rack. "Take it easy" tool finder: colour coding according to profile and size stamp.

Slotted, Phillips, PlusMinus (Pozidriv/slotted), Pozidriv and Application:

TORX® screws

Content: 14-piece set in display carton

•		
05 105631 001		
•	162 i PH VDE	1 x PH 1x80; 1 x PH 2x100
0	165 i PZ VDE	1 x PZ 1x80; 1 x PZ 2x100
0	165 i PZ/S	1 x # 1x80; 1 x # 2x100
	VDE	
0	167 i TORX®	1 x TX 10x80; 1 x TX 15x80; 1 x TX 20x80
	VDE	
•	160 iS	1 x 0,6x3,5x100
•	160 i VDE	1 x 0,4x2,5x80 ¹⁾ ; 1 x 0,8x4,0x100;
		1 x 1,0x5,5x125
•	247	1 x 0,5x3,0x70
	Rack	2 x 190,0x50,0

160 i/165 i/7 Rack screwdriver set Kraftform Plus Series 100, voltage tester and rack











 ${\it Kraft form:}\ {\it The\ safety\ screwdriver\ with\ Lasertip\ blade,\ voltage}$ tester and rack. "Take it easy" tool finder: colour coding according to profile and size stamp.

Application: Slotted and Pozidriv screws

Content: 7-piece set and rack in display carton

•		
05 006148 001		
0	165 i PZ VDE	1 x PZ 1x80; 1 x PZ 2x100
•	160 i VDE	1 x 0,4x2,5x80 ¹⁾ ; 1 x 0,6x3,5x100;
		1 x 0,8x4,0x100; 1 x 1,0x5,5x125
•	247	1 x 0,5x3,0x70

160 i/7 Rack screwdriver set Kraftform Plus Series 100, voltage tester and rack













Kraftform: The safety screwdriver with Lasertip blade, voltage tester and rack. "Take it easy" tool finder: colour coding according to profile and size stamp.

Application: Slotted and Phillips screws

Content: 7-piece set and rack in display carton

•		
05 006147 001		
•	162 i PH VDE	1 x PH 1x80; 1 x PH 2x100
•	160 i VDE	1 x 0,4x2,5x80 ¹⁾ ; 1 x 0,6x3,5x100;
		1 x 0,8x4,0x100; 1 x 1,0x5,5x125
•	247	1 x 0,5x3,0x70

aiT



Kraftform



The outstanding design of the Kraftform handle that fits perfectly into the hand prevents hand injuries such as blisters and calluses.



Tested for dielectric strength



Our screwdrivers are tested for dielectric strength under a 10,000 volt load to make sure that their most important property, their insulation, has been exhaustively tested. Each individual Wera VDE screwdriver is subjected to this test to guarantee safe working up to 1,000 volts.

¹⁾ without Lasertip
"') Product not available in the USA and Canada.

¹⁾ without Lasertip ¹⁾ Product not available in the USA and Canada.

without Lasertip
"Product not available in the USA and Canada."



Big Pack 900 Screwdriver set Kraftform Wera: Chiseldriver and rack













Application: Slotted, Phillips, Pozidriv and TORX® socket screws

Content: 13-piece set

+		
05 133285 001		
•	917 SPH	1 x PH 1x80; 1 x PH 2x100; 1 x PH 3x150
0	918 SPZ	1 x PZ 1x80; 1 x PZ 2x100; 1 x PZ 3x150
•	932 A	1 x 0,6x3,5x80 ¹⁾ ; 1 x 0,8x4,5x90;
		1 x 1,0x5,5x100; 1 x 1,2x7,0x125;
		1 x 1,6x9,0x150
0	977 TORX®	1 x TX 20x90; 1 x TX 25x100
	Rack	2 x 190,0x50,0

¹⁾ No throughout blade, no impact cap and no hexagon bolster

932/6 Screwdriver set Kraftform Wera: Chiseldriver and rack















Application: Slotted and Phillips screws **Content:** 6-piece set and rack in display carton

•		
05 018282 001		
0	917 SPH	1 x PH 1x80; 1 x PH 2x100
•	932 A	1 x 0,6x3,5x80 ¹⁾ ; 1 x 0,8x4,5x90;
		1 x 1,0x5,5x100; 1 x 1,2x7,0x125

¹⁾ No throughout blade, no impact cap and no hexagon bolster

932/918/6 Screwdriver set Kraftform Wera: Chiseldriver and rack















Application: Slotted and Pozidriv screws **Content:** 6-piece set and rack in display carton

•		
05 018287 001		
0	918 SPZ	1 x PZ 1x80; 1 x PZ 2x100
•	932 A	1 x 0,6x3,5x80 ¹⁾ ; 1 x 0,8x4,5x90;
		1 x 1,0x5,5x100; 1 x 1,2x7,0x125

¹⁾ No throughout blade, no impact cap and no hexagon bolster

Tip



Integrated impact cap



An integrated impact cap lengthens the service life and reduces the danger of splintering. Nevertheless, always wear protective goggles.



Hexagon blade



A hexagon blade made from high-quality bit material extends right through the handle — thereby ensuring full transfer of force, even when struck with a hammer. The ductile tempered material prevents the blade from splintering or breaking.



The Campaign valid from 1st March 2018 to 31st August 2018.

We reserve the right to modify without prior notification any details stated in this catalogue regarding product features, versions and designs. No liability for printing errors or mistakes shall be assumed.

Werα Tools (UK) LTD. Units 1 & 2, McGregor's Way Turnoaks Business Park Chesterfield, Derbyshire S40 2WB

Phone: +44 (0)1246 / 277756 Fax: +44 (0)1246 / 273335 eMail: queries@wera-tools.co.uk Internet: www.wera-tools.co.uk

Wera Werkzeuge GmbH Korzerter Straße 21–25 D-42349 Wuppertal

Phone: +49 (0)202/4045-0 Fax: +49 (0)202/403634

E-Mail: info@wera.de

www.wera.de

