

Innovations

and Spring-Summer Campaign 2019





NEW

A round of screwdrivers - Set 1













Often the desire arises for an original gift with high practical value and yet exceptional character. Without compromising on quality of course.

A "round" of screwdrivers! An order usually heard in a bar or pub can now be placed at Wera... and of course you can give yourself a gift.

11-piece screwdriver promotion set with serving tray in Tool Rebel design, plus iconic Wera bottle opener and four Tool Rebel beverage coasters. Bottle opener and screwdriver with "Kraftform Plus handle" for comfortable ergonomic screwdriving, which prevents blisters and calluses. Hard grip zones for comfort at high working speeds and soft grip zones guarantee high torque transfer. "Take it easy" tool finder with color coding according to profiles and size stamping – for easy and quick finding of the required tool. Partly with Lasertip: The tip of Wera Lasertip screwdrivers is roughened microscopically with laser beams. This rough surface literally "bites" into the screw head. Making accidental slippage a thing of the past.

05 134340 001		
•	160 i VDE	1 x 0,4x2,5x80 1); 1 x 0,6x3,5x100
0	350 PH	1 x PH 2x100
0	355 PZ	1 x PZ 1x80; 1 x PZ 2x100
0	367 TORX®	1 x TX 15x80; 1 x TX 20x100; 1 x TX 25x100
•	335	1 x 0,8x4,0x100
•	932 A	1 x 1,0x5,5x100; 1 x 1,2x7,0x125
	bottle opener	1 x 145
	service tray	1 x 320
	coasters	4 x 90

¹⁾ without Lasertip



Wera Bicycle Sets

There are Tool Rebels in the industry and craft sectors – and of course in the leisure sector as well.

We wanted to put together compact screwdriver sets for bicycle applications that are used on the road or professionally in the bicycle workshop.



MEW

Bicycle Set 1



12-piece set, in a pouch; 1 Wera Bit Ratchet Zyklop Mini 1, drop-forged full steel design, suitable for $^1/_4$ " hex bits as per DIN ISO 1173-C 6.3 and E 6.3 and Wera series 1 and 4; can also be used with $^1/_4$ " sockets by using the Wera socket adaptor 870/1; 1 universal bit holder (100 mm) with stainless steel sleeve, retaining ring, and strong permanent magnet; 10 bits, tough, for universal use

05 004170 001		
	8001 A	1 x 1/4"x87,0
●0	899/4/1	1 x 1/4"x100
•	851/1 Z PH	1 x PH 2x25
0	867/1 TORX®	1 x TX 10x25; 1 x TX 25x25
0	840/1 Z Hex-	1 x 2,0x25; 1 x 2,5x25; 1 x 3,0x25; 1 x 4,0x25;
	Plus	1 x 5,0x25; 1 x 6,0x25; 1 x 8,0x25

The tool set to go



The Bicycle Set 1 contains tools for the most popular screw profiles on road bikes, mountain bikes and e-bikes. Thanks to the compact textile-folding pouch, the set is also the ideal companion for cycling tours.

Simple direction change



Simple switching between left/right operations.

Is such a small tool sufficiently resilient?



The Zyklop Mini 1 can withstand at least 65 Nm. That is far more power than can normally be transferred to such a small tool.



MEM

Bicycle Set Torque 1













16 piece-set; in a surface protecting, compact and extremely robust textile box; low volume and weight for simplified mobility.

1 Click-Torque torque wrench A 5 with ${}^{1}/_{4}$ " square drive, covering a range of 2.5 Nm-25 Nm, accuracy \pm 4% of the set value, as per DIN EN ISO 6789-1: 2017-07, for clockwise torque control, reversible ratchet, 45 teeth, easy setting and saving of the desired torque value, with audible and tactile locking when the scale values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached, ergonomic 2-component handle, 4 Zyklop sockets, with ${}^{1}/_{4}$ " drive, 4 Zyklop bit sockets for TORX® screws, with ${}^{1}/_{4}$ " drive, with holding function, 7 bit sockets for hexagon socket screws with ${}^{1}/_{4}$ " drive with holding function; Take it easy tool finder: Colour coding to enable the desired bit socket to be easily selected

05 004180 001		
	Click-Torque	1 x 1/4", 2,5-25 Nm
	A 5	
•	8790 HMA	1 x 10,0x23,0; 1 x 13,0x23,0; 1 x 14,0x23,0;
		1 x 15,0x23,0
0	8767 A HF	1 x TX 10x28,0; 1 x TX 20x28,0;
		1 x TX 25x28,0; 1 x TX 30x28,0
0	8740 A HF	1 x 3,0x28,0; 1 x 4,0x28,0; 1 x 5,0x28,0;
		1 x 5,0x100,0; 1 x 6,0x28,0; 1 x 6,0x100,0;
		1 x 8,0x28,0

For the road and the workshop



textile box.

The Bicycle Set Torque 1 contains tools for the most popular screw profiles on road bikes, mountain bikes and e-bikes. With the included Click-Torque A torque wrench (2.5-25 Nm), even torque-sensitive screwed connections can be loosened and tightened reliably. Clear and compact tool storage in the

Click-Torque Wrench series



Click torque wrench in unmistakable Wera design.

Simple and safe




Easy setting and saving of the desired torque value; readable on the main and fine scales.

Simple setting



With audible and tactile clicks when adjusting the scale values.

Release mechanism



When the set torque value is reached, an audible and tactile mechanism triggers.



Torque indicators with T-handle

A T-handle allows high torque transmission with minimal effort.

We wanted to use this advantage in the development of the new torque indicators with fixed torque values.

NFW

400 Hex Torque-indicator



Pre-set torque: 4,0 Nm, 5,0 Nm; fixed pre-set

Accuracy: ± 10 %. Reliable slipping mechanism and acoustic signal

when reaching the set torque.

Blade: Round

Design: Hex-Plus, brushed chrome-plated finish, Black Point

Handle: T-handle, multi-component

	0		<u> </u>	우'	-	T;	Ø
		Nm	mm	mm	mm		mm
05 005080 001	4,0	4,0	60	48	100	2 3/8"	7,0
05 005081 001	5,0	5,0	60	48	100	2 3/8"	7,0

MEM

400 i Hex VDE Insulated torque-indicator



Application: Hexagon socket screws

Pre-set torque: 5.0 Nm, fixed pre-set

Accuracy: ± 10 %. Reliable slipping mechanism and acoustic signal

when reaching the set torque.

Blade: Insulated, individually tested as per IEC 60900

Design: Hex-Plus, Black Point

Handle: T-handle, multi-component

	0		T:	₽'	-	T:	-[]-
		Nm	mm	mm	mm		mm
05 004980 001	4,0	5,0	90	48	100	3 1/2"	8,0
05 004981 001	5,0	5,0	90	48	100	3 1/2"	8,0

M=M

400 TX Torque-indicator



Pre-set torque: 4,0 Nm, 5,0 Nm; fixed pre-set

Accuracy: ± 10 %. Reliable slipping mechanism and acoustic signal

when reaching the set torque.

Blade: Round

Design: Brushed chrome-plated finish, Black Point

Handle: T-handle, multi-component

	0		T:	♀'	-	T;	Ø
		Nm	mm	mm	mm		mm
05 005090 001	TX 20	4,0	60	48	100	2 3/8"	7,0
05 005091 001	TX 25	5,0	60	48	100	2 3/8"	7,0

Click Torque XP

We wanted to make working with torque wrenches simple and precise.

We also wanted to fulfil the desire for pre-set torque values.

The new torque wrenches "Click-Torque XP" meet exactly these requirements, and of course have the typical trigger click of the Click-Torque series.



MEW

Click-Torque XP 1 pre-set adjustable torque wrench for insert tools



Interior £134.37 special offer £107.50



Application: For right and left-handed use

Pre-set torque: 2.5 Nm

Precision: \pm 4% of set value, as per DIN EN ISO 6789-1: 2017-07

Design: For 9x12 mm interchangeable insert tools; audible and tactile release mechanism when the set torque value is reached

Handle: Ergonomic 2-component handle

		 			نس <i>ت</i>		-			i	-	-	, O	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm					
05 075670 001	9x12	2,5	2,5-25	2-18	217	137	35	24	20	8 35/64"	5 25/64"	1 21/32"	¹⁵ / ₁₆ "	25/32"
05 075670 010 ¹⁾	9x12	2,5	2,5-25	2-18	217	137	35	24	20	8 35/64"	5 25/64 "	1 21/32"	¹⁵ / ₁₆ "	²⁵ / ₃₂ "

¹⁾ Any presetting which differs from this value, can be set to a desired torque value within the specified metered range upon reques

MEM

Click-Torque XP 2 pre-set adjustable torque wrench for insert tools



special offer



Application: For right and left-handed use

Pre-set torque: 10.0 Nm

Precision: \pm 3% of set value, as per DIN EN ISO 6789-1: 2017-07

Design: For 9x12 mm interchangeable insert tools; audible and tactile release mechanism when the set torque value is reached

Handle: Ergonomic 2-component handle

		 			=		-	; 🕞			-	-	Ĭ.		
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05 075671 001	9x12	10,0	10-50	8-36	262	137	35	24	20	10 ⁵ / ₁₆ "	5 ²⁵ / ₆₄ "	1 3/8"	¹⁵ / ₁₆ "	25/"	
05 075671 010 ¹⁾	9x12	10,0	10-50	8-36	262	137	35	24	20	10 ⁵ / ₁₆ "	5 ²⁵ / ₆₄ "	1 ³ / ₈ "	5/_" 16	²⁵ / ₃₂ "	

 $^{^{1}}$ Any presetting which differs from this value, can be set to a desired torque value within the specified metered range upon request



Click-Torque XP



The Click-Torque XP torque wrenches are provided with pre-set torque values. These tools are ideal for all applications where the same torque and repeat accuracy is required.

Release mechanism



When the set torque value is reached, an audible and tactile mechanism triggers.

For exchangeable insert tools



For 9x12 mm or 14x18 mm interchangeable insert tools.

For right and left direction



The Click-Torque wrenches for insert tools are suitable for right-hand and left-hand uses.

Robust models



Very robust design with ergonomic 2-component handle.

Individual pre-setting



The Click-Torque XP torque wrenches with a pre-set torque value can be set to any value within the specified metered range in the test laboratory.

Click-Torque XP 3 pre-set adjustable torque wrench for insert tools





Application: For right and left-handed use

Pre-set torque: 15.0 Nm

 \pm 3% of set value, as per DIN EN ISO 6789-1: 2017-07 **Precision:**

For 9x12 mm interchangeable insert tools; audible and tactile release mechanism when the set torque value is reached Design:

Handle: Ergonomic 2-component handle

		 			-	-	-			in in		-	T O	•	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05 075672 001	9x12	15,0	15-100	11-74	332	137	35	24	20	13 ⁵ / ₆₄ "	5 25/64"	1 ³ / ₈ "	¹⁵ / ₁₆ "	25/ "	
05 075672 010 ¹⁾	9x12	15,0	15-100	11-74	332	137	35	24	20	13 ⁵ / ₆₄ "	5 ²⁵ / ₆₄ "	1 ³ / ₈ "	¹⁵ / ₁₆ "	²⁵ / ₃₂ "	

¹⁾ Any presetting which differs from this value, can be set to a desired torque value within the specified metered range upon request.

Click-Torque XP 4 pre-set adjustable torque wrench for insert tools





Application: For right and left-handed use

Pre-set torque: 20.0 Nm

 \pm 3% of set value, as per DIN EN ISO 6789-1: 2017-07 **Precision:**

For 14x18 mm interchangeable insert tools; audible and tactile release mechanism when the set torque value is reached Design:

Ergonomic 2-component handle **Handle:**

		 		 	-	==1.5	-					-	Ĭ. O	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm					
05 075673 001	14x18	20,0	20-250	15-184	457	145	41	32	26	17 ⁶³ / ₆₄ "	5 45/64"	1 39/64"	1 17/64	1 1/32 "
05 075673 010 ¹⁾	14x18	20,0	20-250	15-184	457	145	41	32	26	17 ⁶³ / ₆₄ "	5 45/64"	1 39/64"	1 17/64	1 1/32 "

¹⁾ Any presetting which differs from this value, can be set to a desired torque value within the specified metered range upon request.

MEW

Click-Torque X 6 torque wrench for insert tools







Application: For right and left-handed use

 \pm 3% of set value, as per DIN EN ISO 6789-1: 2017-07; application range with up to max. 400 Nm above standard DIN EN ISO 6789-1: 2017-07 (maximum value: 340 Nm); **Precision:**

For 14x18 mm interchangeable insert tools; easy setting and saving of the desired torque value, with audible and tactile locking when the scale Design:

values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached

Handle: Ergonomic 2-component handle

•															
			 <u> </u> 		-	-	-			è⇒		-	,		
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05 075656 001	14x18	80-400	1,0	60-295	655	140	47	32	26	25 ²⁵ / ₃₂ "	5 33/64"	1 27/32"	1 17/64	1 1/32"	

MEW

Click-Torque E 1 torque wrench with reversible ratchet







Application: For clockwise torque-control

Precision: \pm 3% of set value, as per DIN EN ISO 6789-1: 2017-07

With 3 / $_{4}^{"}$ square drive, reversible ratchet, 45 teeth; easy setting and saving of the desired torque value, with audible and tactile locking when the scale values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached Design:

Handle: Ergonomic 2-component handle

	0		 <u> </u>	 	نده	o=15	•		(☐	ض ع ت	ص فات	<u></u>		♦
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm					
05 075630 001	3/4"	200-1000	1,0	148-737	1250	140	47	63	30	49 7/32"	5 33/64"	1 27/32"	2 31/64"	1 3/16

Click-Torque C 3 Set 1



 $13\ piece\text{-set};$ in a surface protecting, compact and extremely robust textile box; low volume and weight for simplified mobility.

1 Click-Torque torque wrench C 3 with $^{1/}_{2}$ " square drive, covering a range of 40 Nm-200 Nm, accuracy \pm 3% of the set value, as per DIN EN ISO 6789-1: 2017-07, for clockwise torque control, reversible ratchet, 45 teeth, easy setting and saving of the desired torque value, with audible and tactile locking when the scale values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached, ergonomic 2-component handle, 4 Zyklop sockets, 4 Zyklop bit sockets with holding function for TORX® screws made according to Acument Intellectual Properties specifications, 3 Zyklop bit sockets with holding function for hexagon socket screws, 1 Zyklop extension with free-turning sleeve, short

•		
05 075680 001		
	Click-Torque	1 x 1/2", 40-200 Nm
	C 3	
•	8790 HMC	1 x 10,0x37,0; 1 x 13,0x37,0; 1 x 17,0x37,0;
		1 x 19,0x37,0
0	8767 C HF	1 x TX 30x60,0; 1 x TX 40x60,0;
		1 x TX 45x60,0; 1 x TX 50x60,0
0	8740 C HF	1 x 6,0x60,0; 1 x 8,0x60,0; 1 x 10,0x60,0
●0	8794 SC	1 x 1/2"x125,0





Hollow shaft nutsetter



A screwdriver with a hollow shaft is needed whenever there are screwdriving jobs involving threaded rods i.e. the threaded rod through the nut can slip into the hollow shaft of the screwdriver.

With hollow shaft



The 395 HO screwdrivers have a hollow shaft that can accommodate protruding threaded rods. This is particularly useful when installing/removing mixer taps on washbasins.

N = W

395 HO/3 Nutdriver set



Application: Hexagon headed bolts, screws and nuts

Content: 3-piece set in display carton

395 HO

Tip: The hollow shaft enables seized screws or those on long threads to be tightened and loosened

1 x 10,0x90; 1 x 13,0x90; 1 x 7/16"x90

05**134275**001

NEW

950/9 L Hex-Plus HF 1 L-key set, metric, chrome-plated, with holding function







9-piece set in a two-component clip

Application: Hexagon socket screws

Design: Chrome-plated

Tip: Hex-Plus, holding function for hexagon socket screws on long

arm, sizes: 1,5, 2,0 and 2,5 without holding function

+		
05 022130 001		
0	950 L	1 x 1,5x90 ¹⁾ ; 1 x 2,0x100; 1 x 2,5x112
0	950 L HF	1 x 3,0x126; 1 x 4,0x140; 1 x 5,0x160;
		1 x 6 0x180: 1 x 8 0x200: 1 x 10 0x219

¹⁾ Regular hexagon

MEW

3967/9 TX SXL Multicolour HF Stainless 1 L-key set with holding function, stainless









9-piece set in a two-component clip

Application: TORX® socket screws **Design:** Stainless steel, round

Tip: TORX® on short arm, holding function for TORX® screws made according to Acument Intellectual Properties specifications on long arm, durable plastic sleeve. The contrasting inscriptions on

long arm, durable plastic sleeve. The contrasting inscriptions on the colour-coded sleeves mean that it is easy to recognise the correct sizes and this makes it simpler to find the right tool.

•		
05 022689 001		
00	3967 SXL	1 x TX 8x90; 1 x TX 9x101; 1 x TX 10x112;
	HF TORX®	1 x TX 15x123; 1 x TX 20x137; 1 x TX 25x154;
	Multicolour	1 x TX 27x172; 1 x TX 30x195; 1 x TX 40x224



L-keys with retaining function for hexagon socket screws



The clamping of the screw is achieved by a flexible locking ball. The holding function is especially helpful in confined, hard-to-reach spaces, where there is no room for a second hand to sec



Hexagon socket screws are a problem, because the contact surfaces that transfer the force of the tool to the screw are very narrow. The consequence: the head of the screw can be damaged, usually rounding out the recess. Hex-Plus tools have larger contact surfaces to prevent this, driving from the

flats of the recess, rather than the corners. Good to know: Hex-Plus tools fit into every standard hexagon socket screw!

Secure hold and easy removal



The wear-resistant clip material ensures that the L-keys are securely held yet are easy to remove.



Stainless L-keys are hardened to the same strength as conventional (carbon) steel tools, and prevent extraenous rust forming.





Wera 2go 2 Tool Container



1 dimensionally stable, robust Tool Container with hook and loop fastener system for the attachment of other Wera 2go components as well as Wera textile boxes and pouches with hook and loop fastener zones; high resistance against cuts and stabs; 1 handle and 1 Shoulder Strap with adjustable-width padding, adjustable in length, detachable; 1 removable Tool Quiver with handle and a variable hook and loop fastener partition for a division into as many as 5 inner sections.

05 004351 001		
	Wera 2go Container	1 x 330,0x355,0x115
	Wera 2go 6	1 x 38,0x1470,0
	Wera 2go 4	1 x 165,0x165,0x105

Wera 2go 3 Tool Box



1 dimensionally stable and robust Tool Box, empty, equipped with handle for the storage and transport of tools and small parts; high resistance against cuts and stabs; comes with hook and loop fastener zone for docking with the Wera 2go system.

•				
	D ;			
	mm	mm	mm	
05 004352 001	130,0	325,0	80	

Wera 2go 7 High Tool Box



listprice **£31.16**special offer **£23.99**

1 sturdy, robust High Tool Box, with carrying handle, for storage and transport of long tools and spare parts. High resistance against cuts and stabs. With hook and loop fastener zones for docking onto the Wera 2go system.

-				
	ð;	ĝ	ĝ.	
	mm	mm	mm	
05 004356 001	295,0	100,0	100,0	



Variable thanks to the hook and loop fastener system



The inner and outer hook and loop fastener sections mean that other Wera 2go system components can be just as easily attached as all other Wera tools in boxes and pouches with hook and loop fastener zones. This enables an individual composition of the tools needed for a specific job.

Perfect system supplement



Suitable for docking with the Wera 2go system.



20 piece-set; in a surface protecting, compact and extremely robust textile box; low volume and weight for simplified mobility.

1 Click-Torque A 6 torque wrench with $^{1}/_{4}$ " hexagon drive, covering a range of 2.5 Nm-25 Nm, accuracy \pm 4% of the set value, as per DIN EN ISO 6789-1: 2017-07, for clockwise torque control, reversible ratchet, 45 teeth, easy setting and saving of the desired torque value, with audible and tactile locking when the scale values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached, ergonomic 2-component handle, 6 Zyklop sockets, 1 adapter 1/4 "hexagon to $^{1}/_{4}$ " square, 1 Zyklop extension with free-turning sleeve, short, 11 bits

05 130110 001		
•	Click-Torque	1 x 1/4", 2,5-25 Nm
	A 6	
•	851/4 TZ PH	1 x PH 2x50
0	867/4 Z	1 x TX 15x50; 1 x TX 20x50; 1 x TX 25x50;
	TORX®	1 x TX 27x50; 1 x TX 30x50; 1 x TX 40x50
0	840/4 Z Hex-	1 x 3,0x50; 1 x 4,0x50; 1 x 5,0x50; 1 x 6,0x50
	Plus	
00	870/1	1 x 1/4"x25 ¹⁾
●0	8794 SA	1 x 1/4"x75,0
•	8790 HMA	1 x 6,0x23,0; 1 x 7,0x23,0; 1 x 8,0x23,0;
		1 x 10,0x23,0; 1 x 12,0x23,0; 1 x 13,0x23,0
	Hook and Loop Fastener Strip	1 x 50,0x240,0

¹⁾ With friction ball; for manual nut spinner sockets

Click-Torque A 5 torque wrench with reversible ratchet









Application: For clockwise torque-control

Precision: \pm 4% of set value, as per DIN EN ISO 6789-1: 2017-07

Design: With 1/4" square drive, reversible ratchet, 45 teeth; easy setting and saving of the desired torque value, with audible and tactile locking when the

scale values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached

Handle: Ergonomic 2-component handle

•															
	0	 	 [- -	 	₫	@ =#	-		(☐	أ⊫	G=====	<u>-</u>		♦ □	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05 075604 001	1/4"	2,5-25	0,10	1-18	290	121	42	25	11,5	11 27/64 "	4 49/_"	1 21/32"	1"	7/ ₁₆ "	

Click-Torque A 6 torque wrench with reversible ratchet









Application: For clockwise torque-control

Precision: \pm 4% of set value, as per DIN EN ISO 6789-1: 2017-07

Design: With 1/4" hex drive, reversible ratchet, 45 teeth; easy setting and saving of the desired torque value, with audible and tactile locking when the scale

values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached

Handle: Ergonomic 2-component handle

•															
			 <u> </u> -		ō⇒ ₽⊃	<u>مح</u>	•		(<u>-</u>	أسح ت	⊙=	○		♦ <u> </u>	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05 075605 001	1/4"	2,5-25	0,10	1-18	290	121	42	25	11,5	11 27/64 "	4 49/_"	1 21/32"	1"	7/_" 16	

Click-Torque B 1 torque wrench with reversible ratchet



ecial offer



Application: For clockwise torque-control

Precision: ± 3% of set value, as per DIN EN ISO 6789-1: 2017-07

With 3 / $_{8}^{*}$ square drive, reversible ratchet, 45 teeth; easy setting and saving of the desired torque value, with audible and tactile locking when the scale values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached Design:

Handle: Ergonomic 2-component handle

•															
	0		 <u> </u> -		ق	ص فات	•		 	ئ ے	o ≔i ∷	œ ‡ □		†	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05 075610 001	3/8"	10-50	0,25	8-36	360	140	47	35	16,5	14 11/64"	5 33/64 "	1 27/32 "	1 ³ / ₈ "	5/8"	

Click-Torque B 2 torque wrench with reversible ratchet









Application: For clockwise torque-control

Precision: ± 3% of set value, as per DIN EN ISO 6789-1: 2017-07

With 3/6 square drive, reversible ratchet, 45 teeth; easy setting and saving of the desired torque value, with audible and tactile locking when the scale values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached Design:

Handle: Ergonomic 2-component handle

-															
	0		 <u> </u> 		ق ند ف	∞= 1.5	•		(-	ض حت	∞=	0=		♦ □	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05 075611 001	3/8"	20-100	0,5	15-73	405	140	47	43	18,5	15 ¹⁵ / ₁₆ "	5 33/64 "	1 27/32 "	1 ¹¹ / ₁₆ "	45/ " 64	

Click-Torque C 1 torque wrench with reversible ratchet







Application: For clockwise torque-control

Precision: \pm 3% of set value, as per DIN EN ISO 6789-1: 2017-07

With ½ square drive, reversible ratchet, 45 teeth; easy setting and saving of the desired torque value, with audible and tactile locking when the scale values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached Design:

Handle: Ergonomic 2-component handle

•															
	0		 [قس ة	<u>م</u>	•		14	ئىست	•====	•==		†	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05 075620 001	1/2"	10-50	0,25	8-36	360	140	47	35	16,5	14 11/_"	5 ³³ / ₆₄ "	1 27/32"	1 ³ / ₈ "	5/ "	

Click-Torque C 2 torque wrench with reversible ratchet







Application: For clockwise torque-control

± 3% of set value, as per DIN EN ISO 6789-1: 2017-07 **Precision:**


With ½ square drive, reversible ratchet, 45 teeth; easy setting and saving of the desired torque value, with audible and tactile locking when the scale values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached Design:

Ergonomic 2-component handle **Handle:**

•															
	0		 <u> </u>- - 		å=	ناد ی	•) <u> </u>	ئ ىس ە	<u>مح</u> ات	○	<u></u>	†	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05 075621 001	1/_"	20-100	0,5	15-73	405	140	47	43	18,5	15 ¹⁵ / ₁₆ "	5 33/64 "	1 27/32"	1 11/, "	45/ "	

Click-Torque C 3 torque wrench with reversible ratchet





Application: For clockwise torque-control

Precision: ± 3% of set value, as per DIN EN ISO 6789-1: 2017-07

With 1/2" square drive, reversible ratchet, 45 teeth; easy setting and saving of the desired torque value, with audible and tactile locking when the Design:

scale values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached

Handle: Ergonomic 2-component handle

+															
	0	 	 <u> </u>- - 	 	ئىد ە	o= = 15	-		(ة <u>•</u>	o=====	o==		†	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05 075622 001	1/_"	40-200	1,0	30-146	510	140	47	43	18,5	20 5/64"	5 ³³ / ₆₄ "	1 27/32 "	1 11/, "	45/ ₆₄ "	

Click-Torque C 4 torque wrench with reversible ratchet







Application: For clockwise torque-control

Precision: ± 3% of set value, as per DIN EN ISO 6789-1: 2017-07

With $\frac{1}{2}$ square drive, reversible ratchet, 45 teeth; easy setting and saving of the desired torque value, with audible and tactile locking when the scale values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached Design:

Handle: Ergonomic 2-component handle

•															
	0		 [-		نه ت	ص ا	•		(<u>-</u>	أ ن≡ ث	ص حا ت	•		♦ □	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05 075623 001	1/ "	60-300	1,0	45-220	595	140	47	43	18,5	23 27/64"	5 33/64 "	1 27/32 "	1 11/, "	45/ " 64	

Click-Torque C 5 torque wrench with reversible ratchet







Application: For clockwise torque-control

Accuracy ± 3% of set value, as per DIN EN ISO 6789-1: 2017-07; application range with up to max. 400 Nm above standard DIN EN ISO 6789-1: Precision:


2017-07 (maximum value: 340 Nm)

Design: With $\frac{1}{2}$ square drive, reversible ratchet, 45 teeth; easy setting and saving of the desired torque value, with audible and tactile locking when the

scale values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached

Ergonomic 2-component handle **Handle:**

•															
	0	 	 <u> </u>- - - 		ق	<u>مت</u>	•		t	ئے=ق	ص حا ت	○		♦ □	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05 075624 001	1/_"	80-400	1,0	60-295	680	140	47	43	18,5	26 49/64 "	5 33/64 "	1 27/32"	1 11/, "	45/ ₆₄ "	

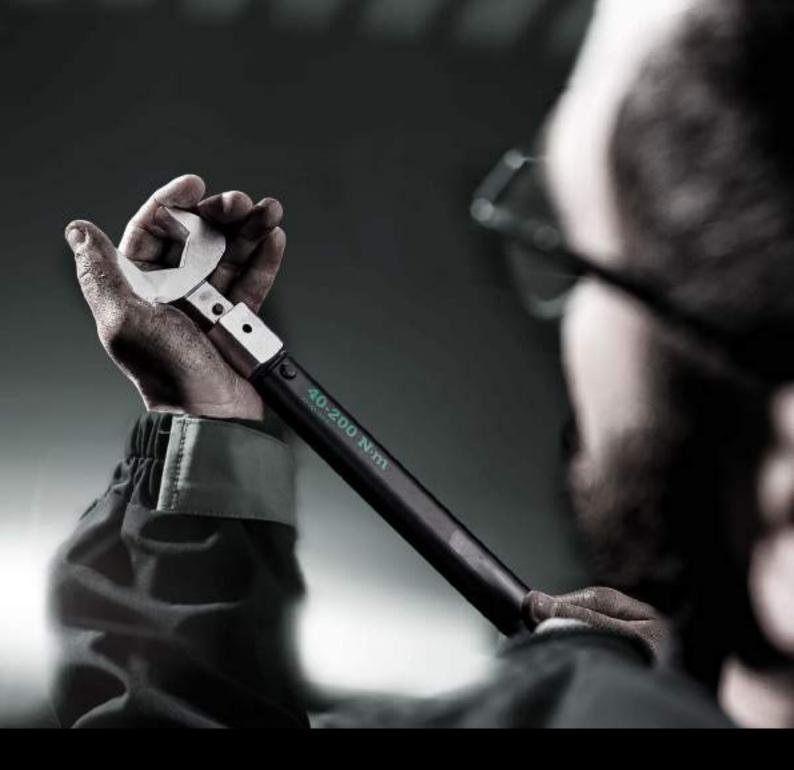

Click-Torque X 1 torque wrench for insert tools



listprice £148.00 special offer £119.00



Application: For right and left-handed use

Precision: \pm 4% of set value, as per DIN EN ISO 6789-1: 2017-07

For 9x12 mm interchangeable insert tools; easy setting and saving of the desired torque value, with audible and tactile locking when the scale values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached Design:

Handle: Ergonomic 2-component handle

•															
			 [- 				-	; ; [o]		₩	-	-			
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05 075651 001	9x12	2,5-25	0,10	1-18	283	121	42	24	20	11 % "	4 49/_"	1 21/32 "	¹⁵ / ₁₆ "	25/ "	

Click-Torque X 2 torque wrench for insert tools







Application: For right and left-handed use

Precision: \pm 3% of set value, as per DIN EN ISO 6789-1: 2017-07

Design: For 9x12 mm interchangeable insert tools; easy setting and saving of the desired torque value, with audible and tactile locking when the scale

values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached

Handle: Ergonomic 2-component handle

•															
					in the state of th		-	,	<u> </u>			-	<u> </u>	•	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05 075652 001	9x12	10-50	0,25	8-36	338	140	47	29	20	13 ⁵ / ₁₆ "	5 ³³ / ₆₄ "	1 ²⁷ / ₃₂ "	1 ⁹ / ₆₄ "	²⁵ / ₃₂ "	

Click-Torque X 3 torque wrench for insert tools







Application: For right and left-handed use

Precision: \pm 3% of set value, as per DIN EN ISO 6789-1: 2017-07

Design: For 9x12 mm interchangeable insert tools; easy setting and saving of the desired torque value, with audible and tactile locking when the scale

values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached

Handle: Ergonomic 2-component handle

•															
		 	 <u> </u>- - -	 	in the state of th		-) Ci_	i e		-	<u> </u>		
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05 075653 001	9x12	20-100	0,5	15-73	372	140	47	29	20	14 41/64"	5 ³³ / ₆₄ "	1 27/32	1 9/64	25/_"	

Click-Torque X 4 torque wrench for insert tools



special offer £141.99



Application: For right and left-handed use

Precision: \pm 3% of set value, as per DIN EN ISO 6789-1: 2017-07

Design: For 14x18 mm interchangeable insert tools; easy setting and saving of the desired torque value, with audible and tactile locking when the scale

values are reached (fine scale only in Newton meters), audible and tactile release mechanism when the set torque value is reached

Handle: Ergonomic 2-component handle

•															
		 	 [-		ini		-			i	-	-	, O	•	
		Nm	Nm	lbf. ft.	mm	mm	mm	mm	mm						
05 075654 001	14x18	40-200	1,0	30-146	480	140	47	32	26	18 ⁵⁷ / ₆₄ "	5 33/64"	1 27/32"	1 17/64	1 1/ "	



Joker Set of ratcheting combination wrenches

















Set of ratcheting combination wrenches 4-piece set Durable pouch

•			
05 073290 001			
	Joker	1 x 10x159; 1 x 13x177; 1 x 17x224;	
		1 x 19x246	

Joker Set of ratcheting combination wrenches













Sold Sold States Set of ratcheting combination wrenches

11-piece set

Durable pouch

•		
05 020013 001		
	Joker	1 x 8x144; 1 x 10x159; 1 x 11x165; 1 x 12x170,7; 1 x 13x177; 1 x 14x188; 1 x 15x200; 1 x 16x212; 1 x 17x224;
		1 x 18x235; 1 x 19x246

Joker Switch Set of ratcheting combination wrenches













Set of ratcheting combination wrenches, reversible 4-piece set

Durable pouch

05 020090 001		
	Joker Switch	1 x 10x159; 1 x 13x179; 1 x 17x225;
		1 x 19x246

Joker Switch Set of ratcheting combination wrenches













Set of ratcheting combination wrenches, reversible 11-piece set Durable pouch

•		
05 020091 001		
	Joker Switch	1 x 8x144; 1 x 10x159; 1 x 11x165;
		1 x 12x171; 1 x 13x179; 1 x 14x187;
		1 x 15x199; 1 x 16x213; 1 x 17x225;
		1 x 18x234; 1 x 19x246

Holding function

The Joker's holding function means that nuts and bolts can be held in the jaw and easily positioned where they are needed. Fastening on to the thread can then be done guickly and safely, thanks to the innovative special stop-plate which holds the fastener. No more time-wasting searches for

dropped nuts and bolts! After applying and positioning the nut or bolt, fastening can begin immediately – no additional tools required.



Constant re-positioning of the wrench? Difficulty holding fasteners in confined spaces? Easing off to avoid any risks of injury or fastener damage? That was yesterday. Today, the Joker prevents slipping off of the fastener head with its integrated limit-stop - no longer is the thumb needed to

act as a depth stop. This makes applications much easier and allows significantly more force to be applied during fastening jobs.



slipping, even at higher torque.

The Joker's clever double-hex geometry delivers a very positive connection with nuts or bolts – it's a perfect fit. And the exchangeable, hardened metal gripping plate in the Joker's mouth literally bites itself into the bolt, with its extremely hard tips. Both features combine to prevent



Small return angle

Instead of 60°, the Joker only has a 30° return angle thanks to it's unique double-hex design. Along with the Joker's straight neck, this means that flipping the wrench has become a thing of the past. With the Joker, you can now loosen and tighten nuts and bolts, in situations where conven-

tional tools fail. Particularly in confined spaces, where conventional open-jawed wrenches cannot be used. The combination of limit stop and small return angle enables eff ective work, even on screw pipe connections.



8007 B VDE Zyklop ratchet, insulated, with switch lever, with 3/g"drive





Application: $^3/_8$ " square sockets as well as for $^3/_8$ " adaptors with square drive, with ball locking device

Design:

Individually tested as per IEC 60900 at 10,000V for safe working at the approved voltage of 1,000V; slim design to enable work in very confined spaces; fine-tooth mechanism with 80 teeth for a return angle of only 4.5°; switch lever for convenient change of direction; secure socket locking function by push button

ĝ, mm 05004966001 222,0

8100 SB VDE 1 Zyklop Ratchet set, insulated, switch lever, 3/2"drive, metric





17 pieces; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility. Fleece backing and hook and loop fastener system for easy attachment, e. g. on wall, shelf, workshop trolley and the Wera 2go tool transport system. Smooth rotating mechanism for safe storage and easy removal of the Zyklop VDE sockets.

1 Zyklop Ratchet 8007 B VDE, with switch lever, with $^3/_8$ " drive, 14 Zyklop VDE sockets, 2 Zyklop VDE extensions, one long, one short, all tools insulated, individually tested as per IEC 60900 at 10,000 V for safe working at the approved voltage of 1,000 V. The Zyklop VDE sockets and extensions offer increased safety through 2-component isolation with yellow insulation core, which becomes visible in case of damage to the outer red VDE insulation layer.

-		
05 004970 001		
0	8007 B VDE	1 x 3/8"x222,0
•	8790 B VDE	1 x 6,0x46,0; 1 x 7,0x46,0; 1 x 8,0x46,0;
		1 x 9,0x46,0; 1 x 10,0x46,0; 1 x 11,0x46,0;
		1 x 12,0x46,0; 1 x 13,0x46,0; 1 x 14,0x46,0;
		1 x 15,0x46,0; 1 x 16,0x46,0; 1 x 17,0x46,0;
		1 x 18,0x46,0; 1 x 19,0x46,0
●0	8794 SB VDE	1 x 3/8"x91,0
	8794 LB VDE	1 x 3/8"x166,0



For tight spaces



The extremely slim design of the Zyklop VDE ratchet makes it easy to work, even in confined spaces.



Ball lock



The ball lock ensures sockets and accessories are securely fitted, providing increased safety during operation. A short press on the release button allows the tool to be changed quickly.



Switch lever



Switch lever for convenient change of direction.



Increased security



The Zyklop VDE sockets and extensions offer increased safety thanks to their 2-component isolation with yellow insulation core under red insulation outer layer.



8100 SA All-in Zyklop Speed Ratchet Set, 1/4" drive, with holding function, metric
















42-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility. Non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the sockets.

1 Zyklop Speed Ratchet with ${}^{1}\!/_{4}$ " drive, 13 Zyklop sockets with ${}^{1}\!/_{4}$ " drive with fastener holding function, 9 Zyklop bit sockets for TORX® screws, with ${}^{1}\!/_{4}$ " drive, with holding function, 8 bit sockets for hexagon socket screws with ${}^{1}\!/_{4}$ " drive with holding function (sizes 2.0 and 2.5 without holding function) and Hex-Plus high torque geometry, 3 Zyklop bit sockets with ${}^{1}\!/_{4}$ " drive for Phillips screws, 3 Zyklop bit sockets with ${}^{1}\!/_{4}$ " drive for slotted screws, Take it easy tool finder: Colour coding to enable the desired bit socket to be easily selected, 1 tool for the simple removal of nuts from sockets with holding function, 1 Zyklop extension (long) with free-turning sleeve. 1 wobble extension with free-turning sleeve, 1 wobble extension.

lisiprice £220.41

•		
05 003755 001		
0	A 0008	1 x 1/4"x152,0
●0	8796 LA	1 x 1/4"x150,0
●0	8794 A	1 x 1/4"x56,0
•	8790 HMA HF	1 x 4,0x23,0; 1 x 4,5x23,0; 1 x 5,0x23,0;
		1 x 5,5x23,0; 1 x 6,0x23,0; 1 x 7,0x23,0;
		1 x 8,0x23,0; 1 x 9,0x23,0; 1 x 10,0x23,0;
		1 x 11,0x23,0; 1 x 12,0x23,0; 1 x 13,0x23,0;
		1 x 14,0x23,0
0	8767 A HF	1 x TX 8x28,0; 1 x TX 9x28,0; 1 x TX 10x28,0;
		1 x TX 15x28,0; 1 x TX 20x28,0; 1 x TX 25x28,0;
		1 x TX 27x28,0; 1 x TX 30x28,0; 1 x TX 40x28,0
0	8740 A	1 x 2,0x28,0; 1 x 2,5x28,0
0	8740 A HF	1 x 3,0x28,0; 1 x 4,0x28,0; 1 x 5,0x28,0;
		1 x 6,0x28,0; 1 x 7,0x28,0; 1 x 8,0x28,0
0	8751 A	1 x PH 1x28,0; 1 x PH 2x28,0; 1 x PH 3x28,0
0	8755 A	1 x PZ 1x28,0; 1 x PZ 2x28,0; 1 x PZ 3x28,0
•	8700 A FL	1 x 0,8x5,5x28,0; 1 x 1,2x6,5x28,0
	Nut Extractor	1 x 14,0x43,0

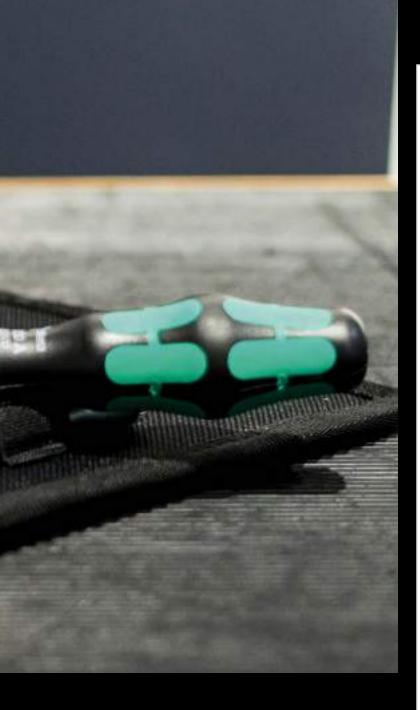



Bit sockets with retaining function for hexagon socket screws



The clamping of the screw is achieved by a flexible locking ball. The holding function is especially helpful in confined, hard-to-reach spaces, where there is no room for a second hand to secure the screw.



Sockets with retaining function for hexagon headed bolts, screws and nuts




secure the screw.

The clamping of the screw is achieved by a twin spring loaded ball retention system. The tubing is effectively protected against mechanical wear and tear by a steel ring. The holding function is especially helpful in confined, hard-to-reach spaces, where there is no room for a second hand to



"Take it easy" tool finder



"Take it easy" tool finder with colour coding according to profiles and size stamp – for simple and rapid accessing of the required tool.





This tool enables hexagon nuts to be easily removed from sockets with holding function.





8100 SA 6 Zyklop Speed Ratchet Set, $\frac{1}{4}$ " drive, metric













special offer £84.99

28-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility $\frac{1}{2} \left(\frac{1}{2} \right) = \frac{1}{2} \left(\frac{1}{2} \right) \left(\frac{1}{2$

1 Zyklop Speed Ratchet with $^{1}/_{4}$ " drive, 9 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 15 bits

05004046004		
05 004016 001		
0	8000 A	1 x 1/4"x152,0
•	8790 HMA	1 x 5,0x23,0; 1 x 5,5x23,0; 1 x 6,0x23,0;
		1 x 7,0x23,0; 1 x 8,0x23,0; 1 x 10,0x23,0;
		1 x 11,0x23,0; 1 x 12,0x23,0; 1 x 13,0x23,0
●0	8794 LA	1 x 1/4"x150,0
●0	8794 A	1 x 1/4"x56,0
•	8784 A1	1 x 1/4"x1/4"x37,0
0	851/4 TZ PH	1 x PH 1x50; 1 x PH 2x50; 1 x PH 3x50
0	855/4 TZ PZ	1 x PZ 1x50; 1 x PZ 2x50
0	867/4 Z	1 x TX 10x50; 1 x TX 15x50; 1 x TX 20x50;
	TORX®	1 x TX 25x50; 1 x TX 27x50; 1 x TX 30x50
0	840/4 Z Hex-	1 x 3,0x50; 1 x 4,0x50; 1 x 5,0x50; 1 x 6,0x50
	Plus	

8100 SB 6 Zyklop Speed Ratchet Set, 3/2" drive, metric













Special offer £104.99

29-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility $\frac{1}{2} \left(\frac{1}{2} \right) = \frac{1}{2} \left(\frac{1}{2} \right) \left(\frac{1}{2$

1 Zyklop Speed Ratchet with $^3/_8$ " drive, 9 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 16 bits

+		
05 004046 001		
0	8000 B	1 x 3/8"x199,0
•	8790 HMB	1 x 8,0x29,0; 1 x 10,0x29,0; 1 x 12,0x29,0;
		1 x 13,0x29,0; 1 x 15,0x29,0; 1 x 16,0x30,0;
		1 x 17,0x30,0; 1 x 18,0x30,0; 1 x 19,0x30,0
●0	8794 LB	1 x 3/8"x200,0
●0	8794 B	1 x 3/8"x76,0
•	8784 B1	1 x 1/4"x3/8"x44,0
•	851/4 TZ PH	1 x PH 1x50; 1 x PH 2x50; 1 x PH 3x50
0	855/4 TZ PZ	1 x PZ 1x50; 1 x PZ 2x50; 1 x PZ 3x50
0	867/4 Z	1 x TX 20x50; 1 x TX 25x50; 1 x TX 27x50;
	TORX®	1 x TX 30x50; 1 x TX 40x50
0	840/4 Z Hex-	1 x 4,0x50; 1 x 5,0x50; 1 x 6,0x50; 1 x 8,0x50
	Plus	
•	800/4 Z	1 x 1,0x5,5x50



8100 SC 6 Zyklop Speed Ratchet Set, 1/2" drive, metric













special offer £138.99

28-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Speed Ratchet with $^{1}/_{2}$ " drive, 10 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 14 bits

		•
05 004076 001		
0	8000 C	1 x 1/2"x277,0
•	8790 HMC	1 x 10,0x37,0; 1 x 11,0x37,0; 1 x 12,0x37,0;
		1 x 13,0x37,0; 1 x 14,0x37,0; 1 x 15,0x37,0;
		1 x 16,0x37,0; 1 x 17,0x37,0; 1 x 18,0x37,0;
		1 x 19,0x37,0
	8794 LC	1 x 1/2"x250,0
	8794 C	1 x 1/2"x52,0
•	8784 C2	1 x 5/16"x1/2"x50,0
0	851/2 Z PH	1 x PH 2x32; 1 x PH 3x32
0	855/2 Z PZ	1 x PZ 2x32; 1 x PZ 3x32
0	867/2 Z	1 x TX 20x35; 1 x TX 25x35; 1 x TX 30x35;
	TORX®	1 x TX 40x35; 1 x TX 45x35; 1 x TX 50x35
0	840/2 Z	1 x 5x30; 1 x 6x30; 1 x 8x30; 1 x 10x30

Pivots freely

The ratchet head pivots freely and can be locked into any defined position by using the slide switch that is positioned on either side. It is even possible to work in very confined and difficult-to-access areas with enhanced hand clearance. The predefined locking at 0°, 15°

and 90°, both to the right and left, ensure safe working without any slipping of the ratchet head.




The Zyklop Speed ratchets are really fast movers.
The gyrating mass design means that screwdriving is accelerated. The rotation-symmetric structure of the Kraftform handle and the free-turning sleeve reinforce this rapid twisting process, particularly when the ratchet

does not engage due to too little resistance in the thread.



All Zyklop Speed ratchets feature a thumbwheel that can be used to quickly and easily switch between clockwise and anticlockwise rotation, at any position. No complicated handling, no loss of time!



The reversible ratchet with 72 fine-pitched teeth has a low return angle of only 5°. This short stroke allows fast and precise work in all types of installation.

8100 SA 7 Zyklop Metal Ratchet Set with push-through square, 1/4" drive, metric







28-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Metal Ratchet with push-through square and $^{1/}_4$ " drive, 9 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 15 bits

•		
05 004017 001		
0	8003 A	1 x 1/4"x141,0
•	8790 HMA	1 x 5,0x23,0; 1 x 5,5x23,0; 1 x 6,0x23,0;
		1 x 7,0x23,0; 1 x 8,0x23,0; 1 x 10,0x23,0;
		1 x 11,0x23,0; 1 x 12,0x23,0; 1 x 13,0x23,0
●0	8794 LA	1 x 1/4"x150,0
●0	8794 A	1 x 1/4"x56,0
•	8784 A1	1 x 1/4"x1/4"x37,0
0	851/1 Z PH	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25
•	855/1 Z PZ	1 x PZ 1x25; 1 x PZ 2x25
0	867/1 TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25;
		1 x TX 25x25; 1 x TX 27x25; 1 x TX 30x25
0	840/1 Z Hex-	1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25
	Plus	

8100 SC 7 Zyklop Metal Ratchet Set with push-through square, $^{1}\!/_{2}$ " drive, metric



28-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Metal Ratchet with push-through square and $^{1}/_{2}$ " drive, 10 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 14 bits

05 004077 001		
0	8003 C	1 x 1/2"x281,0
•	8790 HMC	1 x 10,0x37,0; 1 x 11,0x37,0; 1 x 12,0x37,0;
		1 x 13,0x37,0; 1 x 14,0x37,0; 1 x 15,0x37,0;
		1 x 16,0x37,0; 1 x 17,0x37,0; 1 x 18,0x37,0;
		1 x 19,0x37,0
●0	8794 LC	1 x 1/2"x250,0
●0	8794 C	1 x 1/2"x52,0
•	8784 C2	1 x 5/16"x1/2"x50,0
0	851/2 Z PH	1 x PH 2x32; 1 x PH 3x32
0	867/2 Z	1 x TX 20x35; 1 x TX 25x35; 1 x TX 27x35;
	TORX®	1 x TX 30x35; 1 x TX 40x35; 1 x TX 45x35;
		1 x TX 50x35; 1 x TX 55x35
0	840/2 Z	1 x 5x30; 1 x 6x30; 1 x 8x30; 1 x 10x30

8100 SB 7 Zyklop Metal Ratchet Set with push-through square, 3/8" drive, metric



Ilstprice £133.14 special offer





29-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility $\frac{1}{2} \int_{-\infty}^{\infty} \frac{1}{2} \int_{-\infty}^{\infty$

1 Zyklop Metal Ratchet with $^3/_8$ " drive, 9 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 16 bits

-		
05 004047 001		
0	8003 B	1 x 3/8"x222,0
•	8790 HMB	1 x 8,0x29,0; 1 x 10,0x29,0; 1 x 12,0x29,0;
		1 x 13,0x29,0; 1 x 15,0x29,0; 1 x 16,0x30,0;
		1 x 17,0x30,0; 1 x 18,0x30,0; 1 x 19,0x30,0
●0	8794 LB	1 x 3/8"x200,0
	8794 B	1 x 3/8"x76,0
•	8784 B1	1 x 1/4"x3/8"x44,0
0	851/1 Z PH	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25
0	855/1 Z PZ	1 x PZ 1x25; 1 x PZ 2x25
0	867/1 TORX®	1 x TX 15x25; 1 x TX 20x25; 1 x TX 25x25;
		1 x TX 27x25; 1 x TX 30x25; 1 x TX 40x25
0	840/1 Z Hex-	1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25;
	Plus	1 x 8,0x25



Smooth push-through mechanism, that cannot get lost.



The ball lock holds the sockets and attachments securely, ensuring safe working. A changeover into any predefined position is completed by simply pressing the release button — this is even the case in the 90° position.

8100 SA 8 Zyklop Metal Ratchet Set with switch lever, 1/4" drive, metric



 $28\hbox{-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility}$

1 Zyklop Metal Ratchet with switch lever and $^{1/}_4$ " drive, 9 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 15 bits

05 004018 001		
0	8004 A	1 x 1/4"x141,0
•	8790 HMA	1 x 5,0x23,0; 1 x 5,5x23,0; 1 x 6,0x23,0;
		1 x 7,0x23,0; 1 x 8,0x23,0; 1 x 10,0x23,0;
		1 x 11,0x23,0; 1 x 12,0x23,0; 1 x 13,0x23,0
●0	8794 LA	1 x 1/4"x150,0
●0	8794 A	1 x 1/4"x56,0
•	8784 A1	1 x 1/4"x1/4"x37,0
0	851/1 Z PH	1 x PH 1x25; 1 x PH 2x25; 1 x PH 3x25
0	855/1 Z PZ	1 x PZ 1x25; 1 x PZ 2x25
0	867/1 TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25;
		1 x TX 25x25; 1 x TX 27x25; 1 x TX 30x25
0	840/1 Z Hex- Plus	1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25

8100 SC 8 Zyklop Metal Ratchet Set with switch lever, 1/2" drive, metric



28-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility

1 Zyklop Metal Ratchet with switch lever and $^{1/}_{2}$ " drive, 10 Zyklop sockets, 1 Zyklop extension (long) with free-turning sleeve, 1 wobble extension, 1 adaptor with quick-release chuck, 14 bits

•		
05 004078 001		
0	8004 C	1 x 1/2"x281,0
•	8790 HMC	1 x 10,0x37,0; 1 x 11,0x37,0; 1 x 12,0x37,0;
		1 x 13,0x37,0; 1 x 14,0x37,0; 1 x 15,0x37,0;
		1 x 16,0x37,0; 1 x 17,0x37,0; 1 x 18,0x37,0;
		1 x 19,0x37,0
	8794 LC	1 x 1/2"x250,0
	8794 C	1 x 1/2"x52,0
•	8784 C2	1 x 5/16"x1/2"x50,0
0	851/2 Z PH	1 x PH 2x32; 1 x PH 3x32
0	867/2 Z	1 x TX 20x35; 1 x TX 25x35; 1 x TX 27x35;
	TORX®	1 x TX 30x35; 1 x TX 40x35; 1 x TX 45x35;
		1 x TX 50x35; 1 x TX 55x35
0	840/2 Z	1 x 5x30; 1 x 6x30; 1 x 8x30; 1 x 10x30





Forged, full metal ratchet (chrome-molybdenum) that is extremely robust with a long service life; slim design to enable work in very confined spaces.



Switch lever for convenient change of direction.



Belt A 1 Zyklop socket set with holding function, ¹/₄" drive



10-piece; robust textile socket belt, including snap hook to enable secure fastening to a belt loop or pocket. Non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the sockets.

9 Zyklop sockets with $^{1}/_{4}$ " drive with fastener holding function. Take it easy tool finder: Colour coding to enable the desired socket to be easily selected. 1 tool for the simple removal of nuts from sockets with holding function.

05 003880 001		
•	8790 HMA HF	1 x 4,0x23,0; 1 x 4,5x23,0; 1 x 5,0x23,0; 1 x 5,5x23,0; 1 x 6,0x23,0; 1 x 7,0x23,0; 1 x 8,0x23,0; 1 x 10,0x23,0; 1 x 13,0x23,0
	Nut Extractor	1 x 14,0x43,0
	Belt A 0/9	1 x 39,0x238,0
	Hook and Loop Fastener Strip	1 x 30,0x200,0

Belt A 3 TORX® HF Zyklop bit socket set with holding function, 1/4" drive



9-piece; robust textile socket belt, including snap hook to enable secure fastening to a belt loop or pocket. Non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the tool sockets.

9 Zyklop bit sockets for TORX® screws, with $^{1}/_{4}$ " drive, with holding function. Take it easy tool finder: Colour coding to enable the desired bit socket to be easily selected.

+		
05 003882 001		
0	8767 A HF	1 x TX 8x28,0; 1 x TX 9x28,0; 1 x TX 10x28,0;
		1 x TX 15x28,0; 1 x TX 20x28,0; 1 x TX 25x28,0;
		1 x TX 27x28,0; 1 x TX 30x28,0; 1 x TX 40x28,0
	Belt A 0/9	1 x 39,0x238,0
	Hook and Loop Fastener Strip	1 x 30,0x200,0

Belt A 2 Zyklop In-Hex-Plus bit socket set with holding function, 1/, " drive



8-piece; robust textile socket belt, including snap hook to enable secure fastening to a belt loop or pocket. Non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the sockets.

8 bit sockets for hexagon socket screws with $^{1}/_{4}$ " drive with holding function (sizes: 2.0 and 2.5 without holding function) and Hex-Plus high torque geometry. Take it easy tool finder: Colour coding to enable the desired bit socket to be easily selected.

•		
05 003881 001		
0	8740 A	1 x 2,0x28,0; 1 x 2,5x28,0
0	8740 A HF	1 x 3,0x28,0; 1 x 4,0x28,0; 1 x 5,0x28,0;
		1 x 6,0x28,0; 1 x 7,0x28,0; 1 x 8,0x28,0
	Belt A 0/8	1 x 39,0x220,0
	Hook and Loop Fastener Strip	1 x 30,0x200,0

Belt A 4 Zyklop socket set, 1/4" drive



9-piece; robust textile socket belt, including snap hook to enable secure fastening to a belt loop or pocket. Non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Smooth turning Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the sockets.

9 Zyklop sockets with $^{1}\!/_{\!_4}^{}$ drive. Take it easy tool finder: Colour coding to enable the desired socket to be easily selected.

•		
05 003883 001		
•	8790 HMA	1 x 5,0x23,0; 1 x 5,5x23,0; 1 x 6,0x23,0; 1 x 7,0x23,0; 1 x 8,0x23,0; 1 x 10,0x23,0; 1 x 11,0x23,0; 1 x 12,0x23,0; 1 x 13,0x23,0
	Belt A 0/9	1 x 39,0x238,0
	Hook and Loop Fastener Strip	1 x 30,0x200,0

Belt A Imperial 1 Zyklop In-Hex-Plus bit socket set with holding function, 1/, " drive



9-piece; robust textile socket belt, including snap hook to enable secure fastening to a belt loop or pocket. Non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the sockets.

9 bit sockets for hexagon socket screws with $^{1}/_{4}$ " drive with holding function (sizes: $^{5}/_{64}$ ", $^{3}/_{22}$ " and $^{7}/_{64}$ " without holding function) and Hex-Plus high torque geometry. Take it easy tool finder: Colour coding to enable the desired bit socket to be easily selected.

•		
05 003884 001		
0	8740 A	1 x 5/64"x28,0; 1 x 3/32"x28,0; 1 x 7/64"x28,0
0	8740 A HF	1 x 1/8"x28,0; 1 x 9/64"x28,0; 1 x 5/32"x28,0;
		1 x 3/16"x28,0; 1 x 7/32"x28,0; 1 x 1/4"x28,0
	Belt A 0/8	1 x 39,0x220,0
	Hook and Loop	1 x 30,0x200,0
	Fastener Strip	

Belt B 2 Zyklop In-Hex-Plus bit socket set with holding function, 3/, " drive



8-piece; robust textile socket belt, including snap hook to enable secure fastening to a belt loop or pocket. Non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the sockets.

8 bit sockets for hexagon socket screws with $^3/_8$ " drive with holding function and Hex-Plus high torque geometry. Take it easy tool finder: Colour coding to enable the desired bit socket to be easily selected.

+		
05 003971 001		
0	8740 B HF	1 x 3,0x35,0; 1 x 4,0x35,0; 1 x 5,0x35,0;
		1 x 6,0x35,0; 1 x 7,0x38,5; 1 x 8,0x38,5;
		1 x 9,0x38,5; 1 x 10,0x38,5
	Belt B 0/8	1 x 45,0x275,0
	Hook and Loop Fastener Strip	1 x 30,0x200,0

Belt B 1 Zyklop socket set with holding function, ³/₈" drive



10-piece; robust textile socket belt, including snap hook to enable secure fastening to a belt loop or pocket. Non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the sockets.

9 Zyklop sockets with 3 / $_8$ " drive with fastener holding function. Take it easy tool finder: Colour coding to enable the desired socket to be easily selected. 1 tool for the simple removal of nuts from sockets with holding function.

•		
05 003970 001		
•	8790 HMB HF	1 x 8,0x29,0; 1 x 10,0x29,0; 1 x 12,0x29,0; 1 x 13,0x29,0; 1 x 15,0x29,0; 1 x 16,0x29,0;
		1 x 17,0x29,0; 1 x 18,0x29,0; 1 x 19,0x29,0
	Nut Extractor	1 x 14,0x43,0
	Belt B 0/9	1 x 45,0x310,0
	Hook and Loop Fastener Strip	1 x 30,0x200,0

Belt B 3 TORX® HF Zyklop bit socket set with holding function, 3/, " drive



9-piece; robust textile socket belt, including snap hook to enable secure fastening to a belt loop or pocket. Non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the tool sockets.

9 Zyklop bit sockets for TORX® screws, with $^{3}I_{8}^{\text{ ``}}$ drive, with holding function. Take it easy tool finder: Colour coding to enable the desired bit socket to be easily selected.

+		
05 003972 001		
0	8767 B HF	1 x TX 10x35,0; 1 x TX 15x35,0; 1 x TX 20x35,0;
		1 x TX 25x35,0; 1 x TX 27x35,0; 1 x TX 30x35,0;
		1 x TX 40x35,0; 1 x TX 45x38,5; 1 x TX 50x38,5
	Belt B 0/9	1 x 45,0x310,0
	Hook and Loop	1 x 30,0x200,0
	Fastener Strip	

Belt B 4 Zyklop socket set, 3/8" drive



9-piece; robust textile socket belt, including snap hook to enable secure fastening to a belt loop or pocket. Non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Smooth turning Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the sockets.

9 Zyklop sockets with $^3/_8$ " drive. Take it easy tool finder: Colour coding to enable the desired socket to be easily selected.

•		
05 003973 001		
•	8790 HMB	1 x 8,0x29,0; 1 x 10,0x29,0; 1 x 12,0x29,0;
		1 x 13,0x29,0; 1 x 15,0x29,0; 1 x 16,0x30,0;
		1 x 17,0x30,0; 1 x 18,0x30,0; 1 x 19,0x30,0
	Belt B 0/9	1 x 45,0x310,0
		1 x 30,0x200,0

Belt C 1 Zyklop socket set with holding function, 1/2" drive



7-piece; robust textile socket belt, including snap hook to enable secure fastening to a belt loop or pocket. Non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the sockets.

6 Zyklop sockets with $^{1/}2^{\circ}$ drive with fastener holding function. Take it easy tool finder: Colour coding to enable the desired socket to be easily selected. 1 tool for the simple removal of nuts from sockets with holding function.

•		
05 003995 001		
•	8790 HMC HF	1 x 10,0x37,0; 1 x 13,0x37,0; 1 x 15,0x37,0;
		1 x 16,0x37,0; 1 x 17,0x37,0; 1 x 19,0x37,0
	Nut Extractor	1 x 14,0x43,0
	Belt C 0/6	1 x 45,0x275,0
	Hook and Loop Fastener Strip	1 x 30,0x200,0

MOLDING PUNCTION

Sockets with retaining function for hexagon headed bolts, screws and nuts



secure the screw.

The clamping of the screw is achieved by a twin spring loaded ball retention system. The tubing is effectively protected against mechanical wear and tear by a steel ring. The holding function is especially helpful in confined, hard-to-reach spaces, where there is no room for a second hand to



Practical nonwoven strips



The textile belt can be attached by means of the nonwoven reverse side and the hook and loop strips e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system.

Comes with convenient snap hook



The robust textile belt can be secured to a belt loop or pocket by means of the snap hook.

Nut extractor tool



This tool enables hexagon nuts to be easily removed from sockets with holding function.

Belt C 2 Zyklop In-Hex-Plus bit socket set with holding function, 1/, " drive



6-piece; robust textile socket belt, including snap hook to enable secure fastening to a belt loop or pocket. Non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the sockets.

6 bit sockets for hexagon socket screws with 1/2 drive with holding function and Hex-Plus high torque geometry. Take it easy tool finder: Colour coding to enable the desired bit socket to be easily selected.

•		
05 003996 001		
0	8740 C HF	1 x 4,0x60,0; 1 x 5,0x60,0; 1 x 6,0x60,0; 1 x 7,0x60,0; 1 x 8,0x60,0; 1 x 10,0x60,0
	Belt C 0/6	1 x 45,0x275,0
	Hook and Loop Fastener Strip	1 x 30,0x200,0

Tool-Check PLUS







28 bits, 1 hand holder 813 suitable for the attachment of bits with $^{1}\!/_{4}$ hexagon drive as per DIN ISO 1173-C 6.3 and Wera connection series 1, 1 Rapidaptor bit holder, 1 adaptor 870/1 ($^{1}\!/_{4}$ hexagon to $^{1}\!/_{4}$ square), 7 sockets ($^{1}\!/_{4}$); 1 Wera Bit Ratchet, drop-forged full steel design suitable for the attachment of bits with $^{1}\!/_{4}$ hexagon drive as per DIN ISO 1173-C 6.3 and E 6.3 and Wera connection series 1 and 4; the use of $^{1}\!/_{4}$ sockets is also possible with the application of the Wera adaptor 870/1

05 056490 001		
	8001 A	1 x 1/4"x87,0
•	813	1 x 1/4"x78
●0	889/4/1 K	1 x 1/4"x50
00	870/1	1 x 1/4"x25 ¹⁾
•	8790 HMA	1 x 5,5x23,0; 1 x 6,0x23,0; 1 x 7,0x23,0;
		1 x 8,0x23,0; 1 x 10,0x23,0; 1 x 12,0x23,0;
		1 x 13,0x23,0
•	851/1 TZ PH	2 x PH 1x25; 3 x PH 2x25; 1 x PH 3x25
0	855/1 TH PZ	1 x PZ 1x25; 3 x PZ 2x25; 1 x PZ 3x25
0	867/1 TZ	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25;
	TORX®	1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25
⊚	867/1 Z	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25;
	TORX® BO	1 x TX 25x25; 1 x TX 30x25
0	840/1 Z Hex-	1 x 3,0x25; 1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25;
	Plus	1 x 8,0x25
•	800/1 TZ	1 x 1,0x5,5x25

1) With friction ball; for manual nut spinner sockets

Belt C 3 TORX® HF Zyklop bit socket set with holding function, 1/2" drive



6-piece; robust textile socket belt, including snap hook to enable secure fastening to a belt loop or pocket. Non-woven reverse side and hook and loop strips for simple attachment e.g. to a wall, shelf, tool trolley and to the Wera 2go tool transport system. Fast and easy Twist to Unlock mechanism for secure storage and simple removal of the tool sockets.

6 Zyklop bit sockets for TORX® screws, with $^{1}/_{2}$ " drive, with holding function. Take it easy tool finder: Colour coding to enable the desired bit socket to be easily selected.

+		
05 003997 001		
0	8767 C HF	1 x TX 25x60,0; 1 x TX 30x60,0; 1 x TX 40x60,0;
		1 x TX 45x60,0; 1 x TX 50x60,0; 1 x TX 55x60,0
	Belt C 0/6	1 x 45,0x275,0
	Hook and Loop Fastener Strip	1 x 30,0x200,0



Pouch with 89 mm bits

17-piece set

1 Kraftform bitholding screwdriver 816 R with Rapidaptor quick-release chuck

05 059295 001		
•	816 R	1 x 1/4"x119
0	851/4 Z PH	1 x PH 1x89; 1 x PH 2x89; 1 x PH 3x89
0	855/4 Z PZ	1 x PZ 1x89; 1 x PZ 2x89; 1 x PZ 3x89
•	867/4 Z	1 x TX 10x89; 1 x TX 15x89; 1 x TX 20x89;
	TORX® BO	1 x TX 25x89; 1 x TX 30x89
•	800/4 Z	1 x 1,0x5,5x89
0	840/4 Z Hex-	1 x 3,0x89; 1 x 4,0x89; 1 x 5,0x89; 1 x 6,0x89
	Plus	

Kraftform Kompakt SH 2 PlumbKit













15-piece set; in a surface-preserving, compact and extremely robust textile box; low volume and weight for simplified mobility.

1 Kraftform chiseldriver 932 A (slotted) with pound-thru hexagonal blade and integrated impact cap for screwdriving and light chiselling; 2 socket wrench screwdrivers 395 HO with hollow shaft for tightening or loosening nuts on protruding threaded rods as well as fixed screws; 1 Kraftform Kompakt VDE handle, 4 Kraftform Kompakt VDE interchangeable blades with reduced blade diameter and integrated protective insulation, so low-lying screws can be accessed, individually tested as per IEC 60900; 1 voltage tester 247, 2 Joker Switch ratcheting combination wrenches with holding function for nuts and bolts, protecting against slippage, double hexagon geometry and extremely hard tips on the metal plate to protect against slippage at high torques, with a small return angled at 15° from the handle; 4 L-keys with Hex-Plus profile (prevents the rounding of hexagon socket screws), with holding function for hexagon socket screws, hexagonal ball-end on the long arm, BlackLaser surface, plastic sleeve, all L-keys are easily identified by their colour coding and size marking.

05 136026 001		
•	395 HO	1 x 10,0x90; 1 x 13,0x90
•	932 A	1 x 1,2x7,0x125
	Joker Switch	1 x 10x159; 1 x 13x179
0	950 SPKL HF	1 x 3,0x123; 1 x 4,0x137; 1 x 5,0x154;
	Multicolour	1 x 6,0x172
•	817 VDE	1 x 9x102
0	KK 62 iS	1 x PH 1x154; 1 x PH 2x154
•	KK 60 iS	1 x 0,6x3,5x154; 1 x 1,0x5,5x154
•	247	1 x 0,5x3,0x70
	Hook and Loop Fastener Strip	1 x 50,0x240,0

^{**)} Product not available in the USA and Canada.

Kraftform Micro 12 Universal 1 Screwdriver set for electronic applications













Application: Slotted and Phillips screws, TORX® socket screws, and

Hexagon socket screws

Content: 12-piece set, in a belt pouch

-		
05 073675 001		
0	2050 PH Micr	o 1 x PH 00x60 1); 1 x PH 0x60 2)
0	2067 TORX® HF	1 x TX 5x40; 1 x TX 6x40
•	2035 Micro	1 x 0,23x1,5x40; 1 x 0,30x1,8x60; 1 x 0,40x2,0x60; 1 x 0,40x2,5x80; 1 x 0,50x3,0x80
0	2054 Micro	1 x 0,9x40; 1 x 1,5x60; 1 x 2x60

1) Optimised for Asian PH screws

Kraftform Micro Handle



Multi-component screwdriver handle for ergonomic working.

Applications



Indispensable for many users, including electronics technicians, opticians, precision engineers, jewellers, EDP hardware fitters and model-makers.

 $^{^{2)}\,\}mbox{Size}$ 0 modificated according to JCIS 0 (Japanese Camera Industrial Standard)



Kraftform Big Pack 300





Kraftform Plus – Series 300. With Lasertip blade, voltage tester and rack. Take it easy tool finder: colour coding according to profile and size stamp.

Application: Slotted, cross, Phillips-Recess, Pozidriv and TORX® screws

Content: 14-piece set in display carton

•		
05 105630 001		
0	350 PH	1 x PH 1x80; 1 x PH 2x100; 1 x PH 3x150
0	355 PZ	1 x PZ 1x80; 1 x PZ 2x100; 1 x PZ 3x150
0	367 TORX®	1 x TX 10x80; 1 x TX 15x80; 1 x TX 20x100;
		1 x TX 25x100; 1 x TX 30x115
•	334	1 x 1,2x6,5x150
•	335	1 x 0,6x3,5x100; 1 x 0,8x4,0x100
	Rack	2 x 190,0x50,0

334/6 Rack screwdriver set Kraftform Plus Lasertip and rack



Lasertip round blades and rack. Take it easy tool finder: colour coding according to profile and size stamp.

Application: Slotted and Phillips screws

Content: 6-piece set and rack in display carton

•		
05 105650 001		
0	350 PH	1 x PH 1x80; 1 x PH 2x100
•	334	1 x 1,2x6,5x150
•	335	1 x 0,5x3,0x80 ¹⁾ ; 1 x 0,8x4,0x100;
		1 x 1,0x5,5x125

1) without Lasertip

334/355/6 Rack screwdriver set Kraftform Plus Lasertip and rack











listprice £28.55 special offer £21.00

Lasertip round blades and rack. Take it easy tool finder: colour coding according to profile and size stamp.

Application: Slotted and Pozidriv screws

Content: 6-piece set and rack in display carton

•		
05 105656 001		
0	355 PZ	1 x PZ 1x80; 1 x PZ 2x100
•	334	1 x 1,2x6,5x150
•	335	1 x 0,5x3,0x80 ¹⁾ ; 1 x 0,8x4,0x100;
		1 x 1,0x5,5x125

1) without Lasertip



Take it easy tool finder: colour coding according to profile and size makes it easier to find the right screwdriver in the tool case or at the workplace.



A precisely-focused laser creates a sharp-edged surface structure. This laser treatment results in an edge hardness of up to 1000 HV 0.3. Wera Lasertip "bites" itself into the screw head and prevents any slips out of the recess. It is available for screwdrivers for slotted, Phillips and Pozidriv screws.

Kraftform Big Pack 100 VDE















Kraftform: The safety screwdriver with Lasertip blade, voltage tester and rack. Take it easy tool finder: colour coding according to profile and size stamp.

Application: Slotted, Phillips, PlusMinus (Pozidriv/slotted), Pozidriv and

TORX® screws

Content: 14-piece set in display carton

•		
05 105631 001		
0	162 i PH VDE	1 x PH 1x80; 1 x PH 2x100
0	165 i PZ VDE	1 x PZ 1x80; 1 x PZ 2x100
0	165 i PZ/S VDE	1 x # 1x80; 1 x # 2x100
٥	167 i TORX® VDE	1 x TX 10x80; 1 x TX 15x80; 1 x TX 20x80
•	160 iS	1 x 0,6x3,5x100
•	160 i VDE	1 x 0,4x2,5x80 ¹⁾ ; 1 x 0,8x4,0x100;
		1 x 1,0x5,5x125
•	247	1 x 0,5x3,0x70
	Rack	2 x 190,0x50,0

160 i/165 i/7 Rack screwdriver set Kraftform Plus Series 100, voltage tester and rack













Kraftform: The safety screwdriver with Lasertip blade, voltage tester and rack. Take it easy tool finder: colour coding according to profile and size stamp.

Application: Slotted and Pozidriv screws

Content: 7-piece set and rack in display carton

05 006148 001		
0	165 i PZ VDE	1 x PZ 1x80; 1 x PZ 2x100
•	160 i VDE	1 x 0,4x2,5x80 ¹⁾ ; 1 x 0,6x3,5x100;
		1 x 0,8x4,0x100; 1 x 1,0x5,5x125
•	247	1 x 0,5x3,0x70

160 i/7 Rack screwdriver set Kraftform Plus Series 100, voltage tester and rack













Kraftform: The safety screwdriver with Lasertip blade, voltage tester and rack. Take it easy tool finder: colour coding according to profile and size stamp.

Application: Slotted and Phillips screws

Content: 7-piece set and rack in display carton

•		
05 006147 001		
0	162 i PH VDE	1 x PH 1x80; 1 x PH 2x100
•	160 i VDE	1 x 0,4x2,5x80 ¹⁾ ; 1 x 0,6x3,5x100;
		1 x 0,8x4,0x100; 1 x 1,0x5,5x125
•	247	1 x 0,5x3,0x70

Big Pack 900 Screwdriver set Kraftform Wera: Chiseldriver and rack
















Application: Slotted, Phillips, Pozidriv and TORX® socket screws

13-piece set **Content:**

•		
05 133285 001		
0	917 SPH	1 x PH 1x80; 1 x PH 2x100; 1 x PH 3x150
0	918 SPZ	1 x PZ 1x80; 1 x PZ 2x100; 1 x PZ 3x150
•	932 A	1 x 0,6x3,5x80 ¹⁾ ; 1 x 0,8x4,5x90;
		1 x 1,0x5,5x100; 1 x 1,2x7,0x125;
		1 x 1,6x9,0x150
0	977 TORX®	1 x TX 20x90; 1 x TX 25x100
	Rack	2 x 190,0x50,0

¹⁾ No throughout blade, no impact cap and no hexagon bolster

¹⁾ without Lasertip
"') Product not available in the USA and Canada.

without Lasertip
"Product not available in the USA and Canada."

¹⁾ without Lasertip ¹⁷ Product not available in the USA and Canada.

932/6 Screwdriver set Kraftform Wera: Chiseldriver and rack















Application: Slotted and Phillips screws **Content:** 6-piece set and rack in display carton

+		
05 018282 001		
0	917 SPH	1 x PH 1x80; 1 x PH 2x100
•	932 A	1 x 0,6x3,5x80 ¹⁾ ; 1 x 0,8x4,5x90;
		1 x 1,0x5,5x100; 1 x 1,2x7,0x125

¹⁾ No throughout blade, no impact cap and no hexagon bolster

932/918/6 Screwdriver set Kraftform Wera: Chiseldriver and rack















Application: Slotted and Pozidriv screws **Content:** 6-piece set and rack in display carton

•		
05 018287 001		
0	918 SPZ	1 x PZ 1x80; 1 x PZ 2x100
•	932 A	1 x 0,6x3,5x80 ¹⁾ ; 1 x 0,8x4,5x90;
		1 x 1,0x5,5x100; 1 x 1,2x7,0x125

¹⁾ No throughout blade, no impact cap and no hexagon bolster



Individually tested



Our screwdrivers are tested for dielectric strength under a 10,000 volt load to make sure that their most important property, their insulation, has been exhaustively tested. Each individual Wera VDE screwdriver is subjected to this test to guarantee safe working up to 1,000 volts.



The chiseldriver



An integrated impact cap lengthens the service life and reduces the danger of splintering. Nevertheless, always wear protective goggles.



Pound-thru blade



A hexagon blade made out of high-quality bit material extends right through the handle — thereby ensuring full transfer of force, even when struck with a hammer. The ductile tempered material prevents the blade from splintering or breaking.



Integrated hex bolster



Greater torque can be transferred by fitting an open-jaw or ring spanner over the integrated hex bolster.



950/9 Hex-Plus 1 SB L-key set, metric, chrome-plated



9-piece set in a two-component clip

Application: Hexagon socket screws

Design: Chrome-plated

Tip: Hex-Plus, ball-end hexagon on long arm

-			4013288
05 073391 001			030160
	0	950 PKL	
		1 x 1.5x90 ¹⁾ ;	
		1 x 2.0x100; 1 x 2.5x112;	
		1 x 3.0x126;	
		1 x 4.0x140;	
		1 x 5.0x160;	
		1 x 6.0x180;	
		1 x 8.0x200;	
		1 x 10.0x219	

1) Regular hexagon

950/9 Hex-Plus 6 SB L-key set, metric, BlackLaser









9-piece set in a two-component clip

Application: Hexagon socket screws Design: BlackLaser surface

Tip: Hex-Plus, ball-end hexagon on long arm


•			4013288
05 073596 001			106414
	0	950 PKL BM	
		1 x 1.5x90 ¹⁾ ;	
		1 x 2.0x100; 1 x 2.5x112;	
		1 x 3.0x126;	
		1 x 4.0x140;	
		1 x 5.0x160;	
		1 x 6.0x180;	
		1 x 8.0x200;	
		1 x 10.0x219	

1) Regular hexagon

950/9 Hex-Plus Multicolour 1 SB L-key set, metric, **BlackLaser**







9-piece set in a two-component clip

Application: Hexagon socket screws

Design: BlackLaser surface, durable plastic sleeve. The contrasting inscriptions on the colour-coded sleeves mean that it is easy

to recognise the correct sizes and this makes it simpler to find

the right tool.

Tip: Hex-Plus, ball-end hexagon on long arm

05 073593 001		
0	950 SPKL Multicolour	1 x 1,5x90; 1 x 2,0x101; 1 x 2,5x112; 1 x 3,0x123; 1 x 4,0x137; 1 x 5,0x154;
		1 x 6.0x172: 1 x 8.0x195: 1 x 10.0x224

950/9 Hex-Plus Multicolour HF 1 L-key set, metric, BlackLaser, with holding function



9-piece set in a two-component clip

Application: Hexagon socket screws

Design: BlackLaser surface, durable plastic sleeve. The contrasting

inscriptions on the colour-coded sleeves mean that it is easy to recognise the correct sizes and this makes it simpler to find

the right tool.

Hex-Plus, ball-end hexagon on long arm, holding function for hexagon socket screws, sizes: 1,5, 2,0 and 2,5 without holding function $\,$ Tip:

05 022210 001		
0	950 SPKL	1 x 1,5x90; 1 x 2,0x101; 1 x 2,5x112
	Multicolour	
0	950 SPKL HF	1 x 3,0x123; 1 x 4,0x137; 1 x 5,0x154;
	Multicolour	1 x 6.0x172: 1 x 8.0x195: 1 x 10.0x224




Ball tip



The spherical drive profile means that it is possible to swivel the axis of the tool to that of the screw, and therefore enable angled, "around-thecorner" screwdriving jobs.



Hex-Plus



Hexagon socket screws are a problem, because the contact surfaces that transfer the force of the tool to the screw are very narrow. The consequence: the head of the screw can be damaged, usually rounding out the recess. Hex-Plus tools have larger contact surfaces to prevent this, driving from the

flats of the recess, rather than the corners. Good to know: Hex-Plus tools fit into every standard hexagon socket screw!



Take it easy tool finder system



Take it easy tool finder system - with profile and size colour-coding for quick and easy tool selection. Colour-coded system for hexagon drive screws (L-Keys, Zyklop bit sockets), external hex drive screws and nuts (Joker wrenches, Zyklop sockets and Zyklop bit sockets with holding

function), and TORX® drive screws (L-Keys, Zyklop bit sockets).

3950/9 Hex-Plus Multicolour Stainless 1 L-key set, metric, stainless









listprice £36.51
special offer



9-piece set in a two-component clip

Application: Hexagon socket screws

Design: Stainless steel, durable plastic sleeve. The contrasting

inscriptions on the colour-coded sleeves mean that it is easy to recognise the correct sizes and this makes it simpler to find

the right tool.

Tip: Hex-Plus, ball-end hexagon on long arm

05022669001 O 3950 SPKL Multicolour 1 x 1,5x90; 1 x 2,0x101; 1 x 2,5x112; 1 x 3,0x123; 1 x 4,0x137; 1 x 5,0x154; 1 x 6,0x172; 1 x 8,0x195; 1 x 10,0x224

967/9 TX XL Multicolour 1 Multicolour L-key set for TORX® screws, long





listprice \$58.95 special offer





9-piece set in a two-component clip

Application: TORX® socket screws

Design: Zinc-phosphated, durable plastic sleeve. The contrasting

inscriptions on the colour-coded sleeves mean that it is easy to recognise the correct sizes and this makes it simpler to find

the right tool.

Tip: TORX® on short arm, TORX® ball end on long arm, TX 8, TX 9,

TX 10: without ball-end at the long arm

•		
05 024480 001		
00	967 SXL TORX® Multicolour	1 x TX 8x90; 1 x TX 9x101; 1 x TX 10x112
00	967 SPKXL TORX® Multicolour	1 x TX 15x123; 1 x TX 20x137; 1 x TX 25x154; 1 x TX 27x172; 1 x TX 30x195; 1 x TX 40x224

967/9 TX XL Multicolour HF 1 L-key set with holding function, long











9-piece set in a two-component clip

Application: TORX® socket screws

Design: Zinc-phosphated, durable plastic sleeve. The contrasting

inscriptions on the colour-coded sleeves mean that it is easy to recognise the correct sizes and this makes it simpler to find

the right tool.

Tip: Holding function for TORX® screws made according to Acument

Intellectual Properties specifications

05 024470 001		
00	967 SXL	1 x TX 8x90; 1 x TX 9x101; 1 x TX 10x112;
	HF TORX®	1 x TX 15x123; 1 x TX 20x137; 1 x TX 25x154;
	Multicolour	1 x TX 27x172: 1 x TX 30x195: 1 x TX 40x224

967/9 TX Multicolour HF 1 L-key set with holding function





istprice **£32.58** pecial offer






9-piece set in a two-component clip

Application: TORX® socket screws

Design: Round

Tip: Holding function for TORX® screws made according to Acument

Intellectual Properties specifications, BlackLaser surface, durable plastic sleeve. The contrasting inscriptions on the colour-coded sleeves mean that it is easy to recognise the correct sizes and this makes it simpler to find the right tool.





In tight assembly or disassembly situations, for example in engine compartments, it is not possible to securely hold the screw with the hand on the screwdriver, and the screw subsequently often gets lost. Lengthy searches or the loss of the screw (with the associated danger that could bring about)

are the consequence. The HF tools developed by Wera are ideal because they feature an optimised geometry of the original TORX® profile. The wedging forces resulting from the surface pressure between the drive tip and the screw profile mean that the screw is securely held on the tool!

Bit-Check 12 BiTorsion 1









1 bit holder Rapidaptor with quick-release chuck, 11 BiTorsion bits for long service life, tough, for universal use. The "Take it easy" Bit-Checks have bits with a sleeve which – from its colour and size designation – make it simple to access the right bit quickly.

05 057420 001		
●0	889/4/1 K	1 x 1/4"x50
•	851/1 BTZ PH	1 x PH 1x25; 2 x PH 2x25
0	855/1 BTZ PZ	1 x PZ 1x25; 2 x PZ 2x25
0	867/1 TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25;
	BTZ	1 x TX 25x25; 1 x TX 30x25



1 universal bit holder with stainless steel sleeve, retaining ring, and strong permanent magnet, 29 bits, tough, for universal use.

05 057908 001		
●0	899/4/1	1 x 1/4"x50
0	867/1 TORX®	3 x TX 10x25; 5 x TX 15x25; 8 x TX 20x25;
		7 x TX 25x25; 4 x TX 30x25; 2 x TX 40x25

Bit-Check 30 Metal 1





1 universal bit holder with stainless steel sleeve, retaining ring, and strong permanent magnet, 29 bits, tough (Z), for universal use.

05 057434 001		
●0	899/4/1	1 x 1/4"x50
•	851/1 Z PH	3 x PH 1x25; 3 x PH 2x25; 2 x PH 3x25
0	855/1 Z PZ	3 x PZ 1x25; 3 x PZ 2x25; 3 x PZ 3x25
0	867/1 TORX®	1 x TX 10x25; 1 x TX 15x25; 1 x TX 20x25;
		1 x TX 25x25; 1 x TX 30x25; 1 x TX 40x25
•	800/1 Z	1 x 0,6x4,5x25; 1 x 1,0x5,5x25; 1 x 1,2x6,5x25
0	840/1 Z Hex-	1 x 4,0x25; 1 x 5,0x25; 1 x 6,0x25
	Plus	

Bit-Check 30 Wood 2



1 universal bit holder with stainless steel sleeve, retaining ring, and strong permanent magnet, 29 bits, tough, for universal use.

05 057432 001		_
●0	899/4/1	1 x 1/4"x50
•	851/1 Z PH	1 x PH 2x25
0	855/1 Z PZ	2 x PZ 1x25; 5 x PZ 2x25; 2 x PZ 3x25
0	867/1 TORX®	3 x TX 10x25; 4 x TX 15x25; 4 x TX 20x25;
		4 x TX 25x25; 3 x TX 30x25; 1 x TX 40x25

The Innovations and Spring Campaign 2019 promotion shows net prices in £ Ex VAT and is valid from 1st March 2019 to 31st August 2019. List Prices shown are valid as of April 1st 2019, any conflicting pre-existing List Prices remain valid throughout March 2019. We reserve the right to modify without prior notification any details stated in this Price List regarding product features, versions and designs.

No liability for printing errors or mistakes shall be assumed.

Wera Tools (UK) LTD. Units 1-8, Railway View Clay Cross Chesterfield, S45 9FR

Phone: +44 (0)1246 / 277756 Fax: +44 (0)1246 / 273335 eMail: queries@wera-tools.co.uk Internet: www.wera-tools.co.uk



